

Aquaponics Tank Sensing Kit

Team 36: Shannon Kuruc, Emily Wang, and Tony Xiao

ECE 445 Design Review - Spring 2018

TA: Yamuna Phal

Aquaponics Tank Sensing Kit

1 Introduction	2
1.1 Objectives	2
1.2 Background	2
1.3 High-Level Requirements List	3
2 Design	4
2.1 Block Diagram	5
2.2 Block Descriptions	6
2.3 Requirements and Verification	12
2.4 Tolerance Analysis	17
3 Cost and Schedule	19
3.1 Cost Analysis	19
Labor	19
Parts List	20
Grand Total	20
3.2 Schedule	21
4 Ethics and Safety	23
5 Citations	25

1 Introduction

1.1 Objectives

Our goal is to build a low-cost, off-grid solar powered pump and sensor system to use as part of maintaining a multi-hundred gallon aquaponics system. We are trying to replace manual water chemistry tests with an automated sensor system. This issue was brought to our attention by Professor Brian Lilly. His work with tilapia farming to aid HIV-positive women in Kenya with the organization Living Positive Kenya is what motivates our project. Currently, their indoor farming setup has a capacity of about 300 fish per each of their four tanks. The future goals of the farmers is to have 600-900 fish per tank in order to increase profit margins and provide food for the community.

1.2 Background

In order to maintain a viable ecosystem for the fish, the water in the fish tank must be tested on a regular basis. Currently, all tests are done manually using chemical test strips. Unfortunately, due to the complexities of maintaining a viable ecosystem for the fish and vegetables, scaling up is not feasible in the current climate. As a result, we are working to develop a kit in order to monitor the pH, dissolved oxygen, and temperature of the water in each of the fish tanks and easily display the results and notify the farmers that a tank needs maintenance. Currently, measurements have to be done by hand with pH kits and they do not have similar automated monitoring equipment. The hope is that with an easier way to monitor the status and health of the fishes' environment, low income families/villagers will be able to scale up the amount of fish per tank and the number of tanks overall.

There already exists solutions for hobbyists and industrial scale fish farming. These existing kits either produce fish at a loss for hobbyists or rely on economies of scale to turn a profit at an industrial scale. The goal of our aquaponics kit is to give families and villages in Africa a viable and sustainable fish farming option to supplement their income. We believe that we can make a custom solar powered pump system that would be lower cost than commercial fish farming equipment and implement the necessary sensors to aid farmers in monitoring the fish tank. Not only are these sensing systems cost prohibitive to a nation whose average yearly income is \$1,380 [1], but they are not sustainable.

For our monitoring system, we chose sensors that made sense based on importance for hydroponics and cost effectiveness. We chose to focus on measuring the pH, dissolved oxygen, and temperature of the farming tanks since these are the measurements that are required to be taken most often in order to maintain proper health of the system [2].

Another one of our objectives was to make this system off-grid such that it is completely solar powered. Current solutions, as mentioned above, rely on an AC power source. This system must be solar powered, as many communities in Africa do not have reliable power infrastructure and it is often unreliable. Since the regions where we are targeting do not have the proper education about the safe disposal of batteries, we had to consider what kind of components would

go into our design so that we would only need one relatively small and long lasting battery per tank. We hope that our final product will be both economically viable and environmentally friendly.

1.3 High-Level Requirements List

- Farmers will be quickly be able to determine if the levels of the pH, dissolved oxygen, and temperature levels of each tank are out of range for tilapia.
- Based on hourly dissolved oxygen readings, the microcontroller should trigger the aqua pump to re-oxygenate the water.
- Kit will be completely solar powered.

2 Design

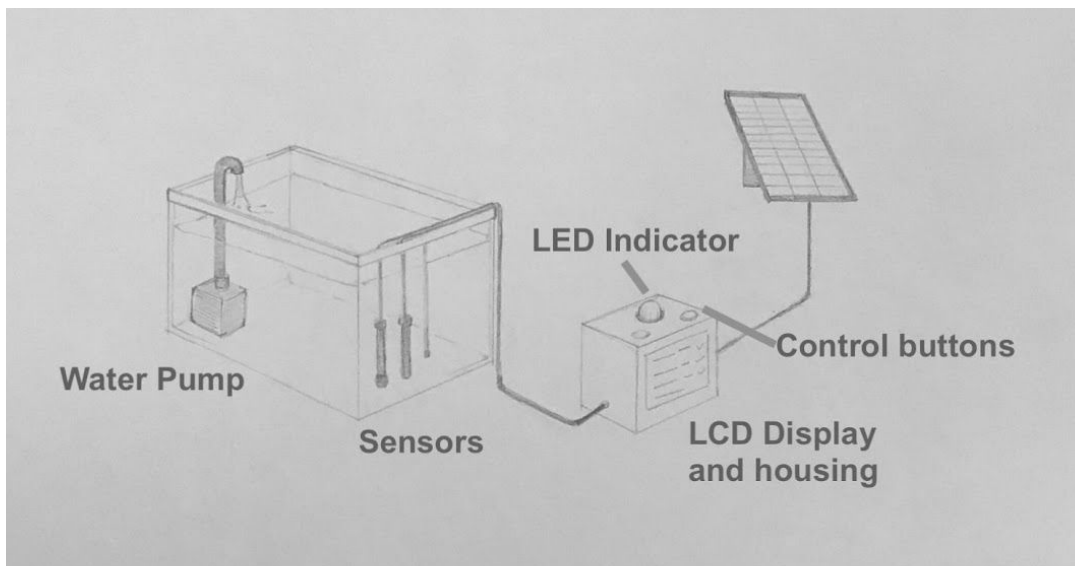


Figure 1: Physical Design

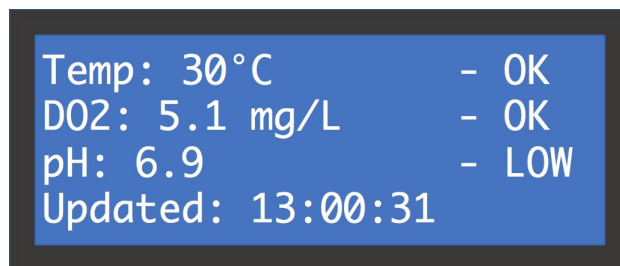


Figure 2: LCD Display Sample

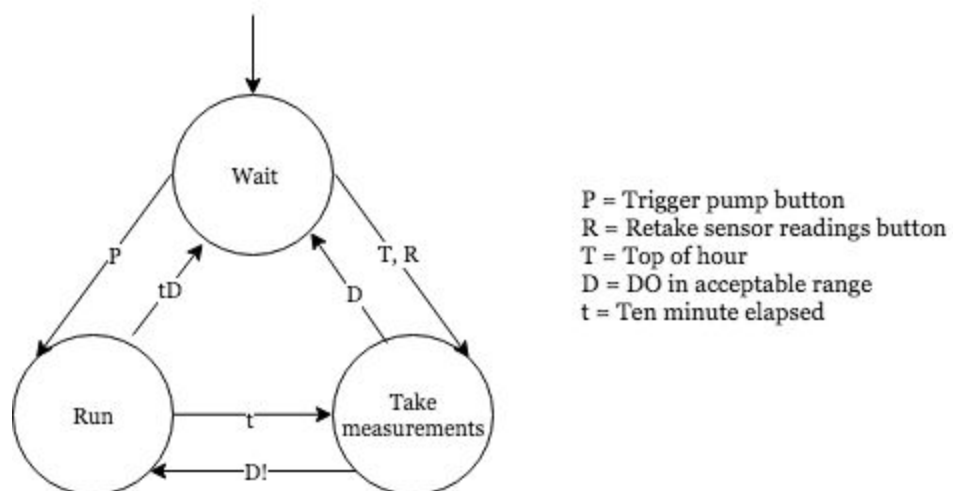


Figure 3: High-Level System Control Logic

2.1 Block Diagram

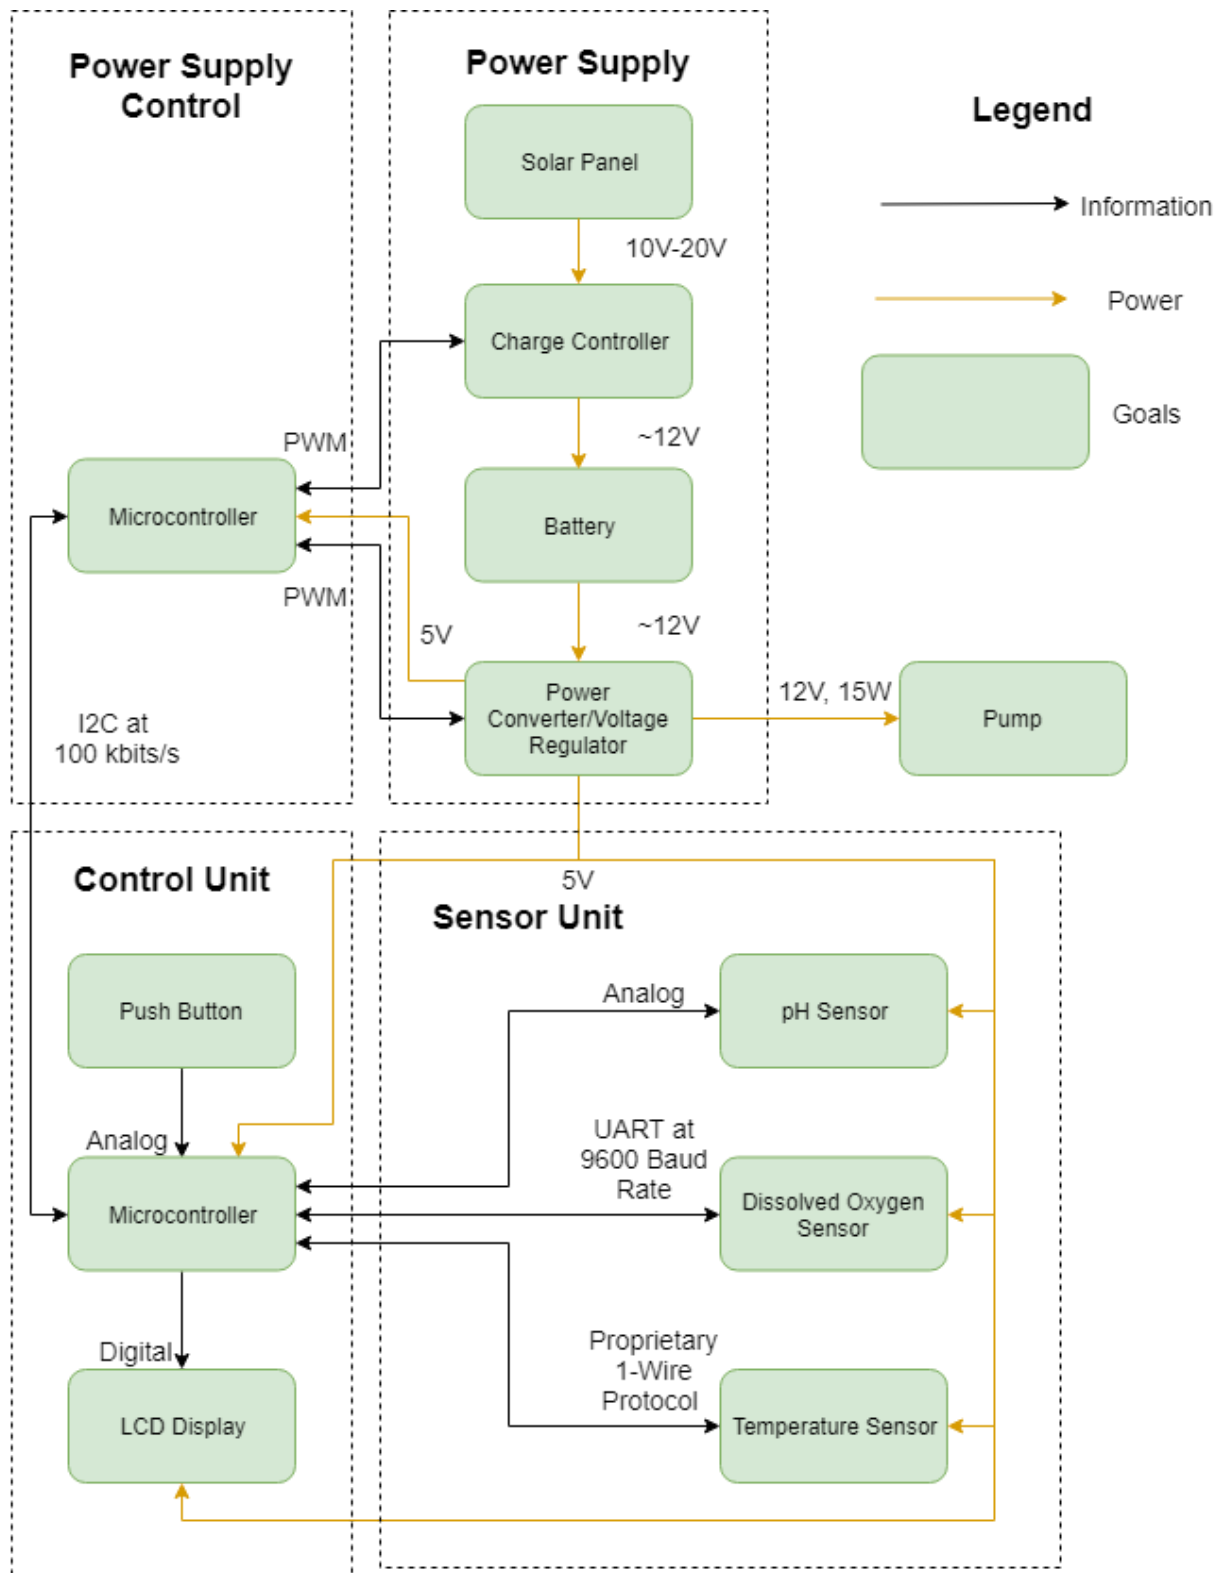


Figure 4. Complete Block Diagram with Voltage and Protocol Requirements

2.2.3 Battery

Should power the system for 12 hours without sunlight. This translates to 4 hours of continuous operation since we are anticipating only running the pump for 10 minutes each hour automatically. The 4 hours of continuous operation also includes another 2 watt-hours of operation for the other electrical components and the capacity to manually start the pump.

At the time of writing, the battery has not been chosen/purchased and is still up to debate between the team and requirements of the fish farm. The possibility of purchasing a 12 V, 7-9 Ah battery is under consideration. An oversized battery would allow for customization in the number of pumps added to each fish tank as well as reducing the number of deep discharges of the battery to prolong its lifespan.

2.2.4 Power Converter/Voltage Regulator

The power converter/voltage regulator must be a DC-DC converter that is able to output 5V $\pm 10\%$ at 0.5W (microcontroller), 12V $\pm 10\%$ at 15W (pump). Figure 7 is based off of the TLV760 chip.

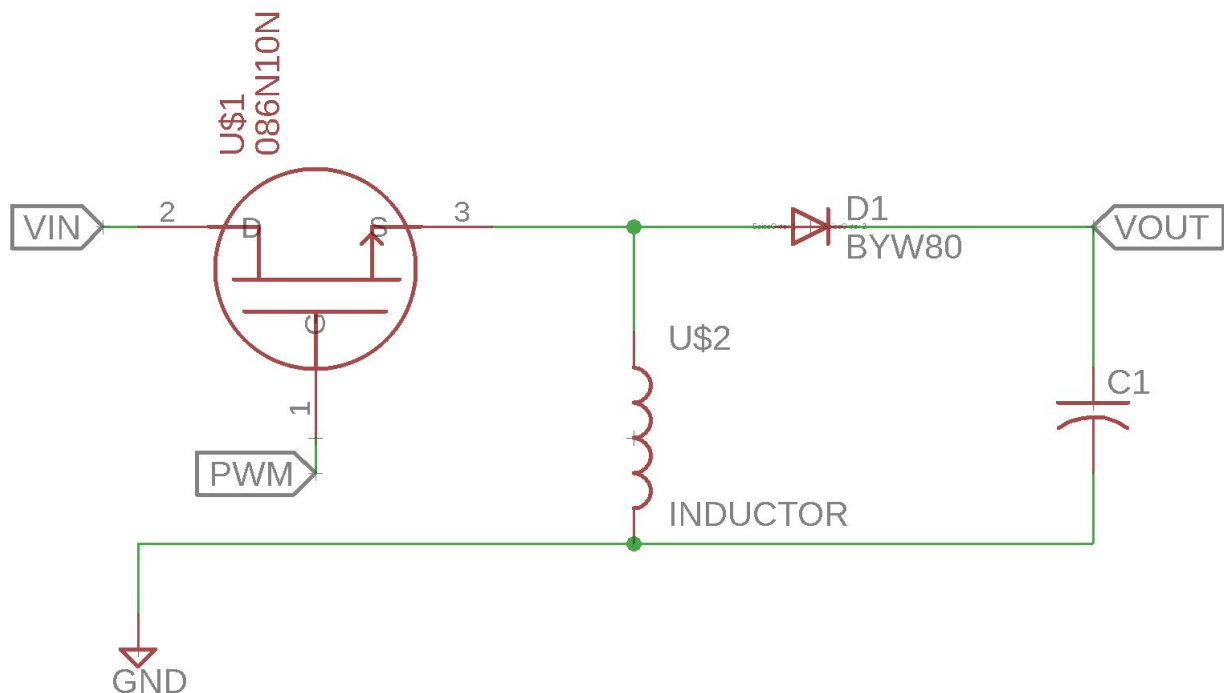


Figure 6. Buck-Boost Converter Schematic

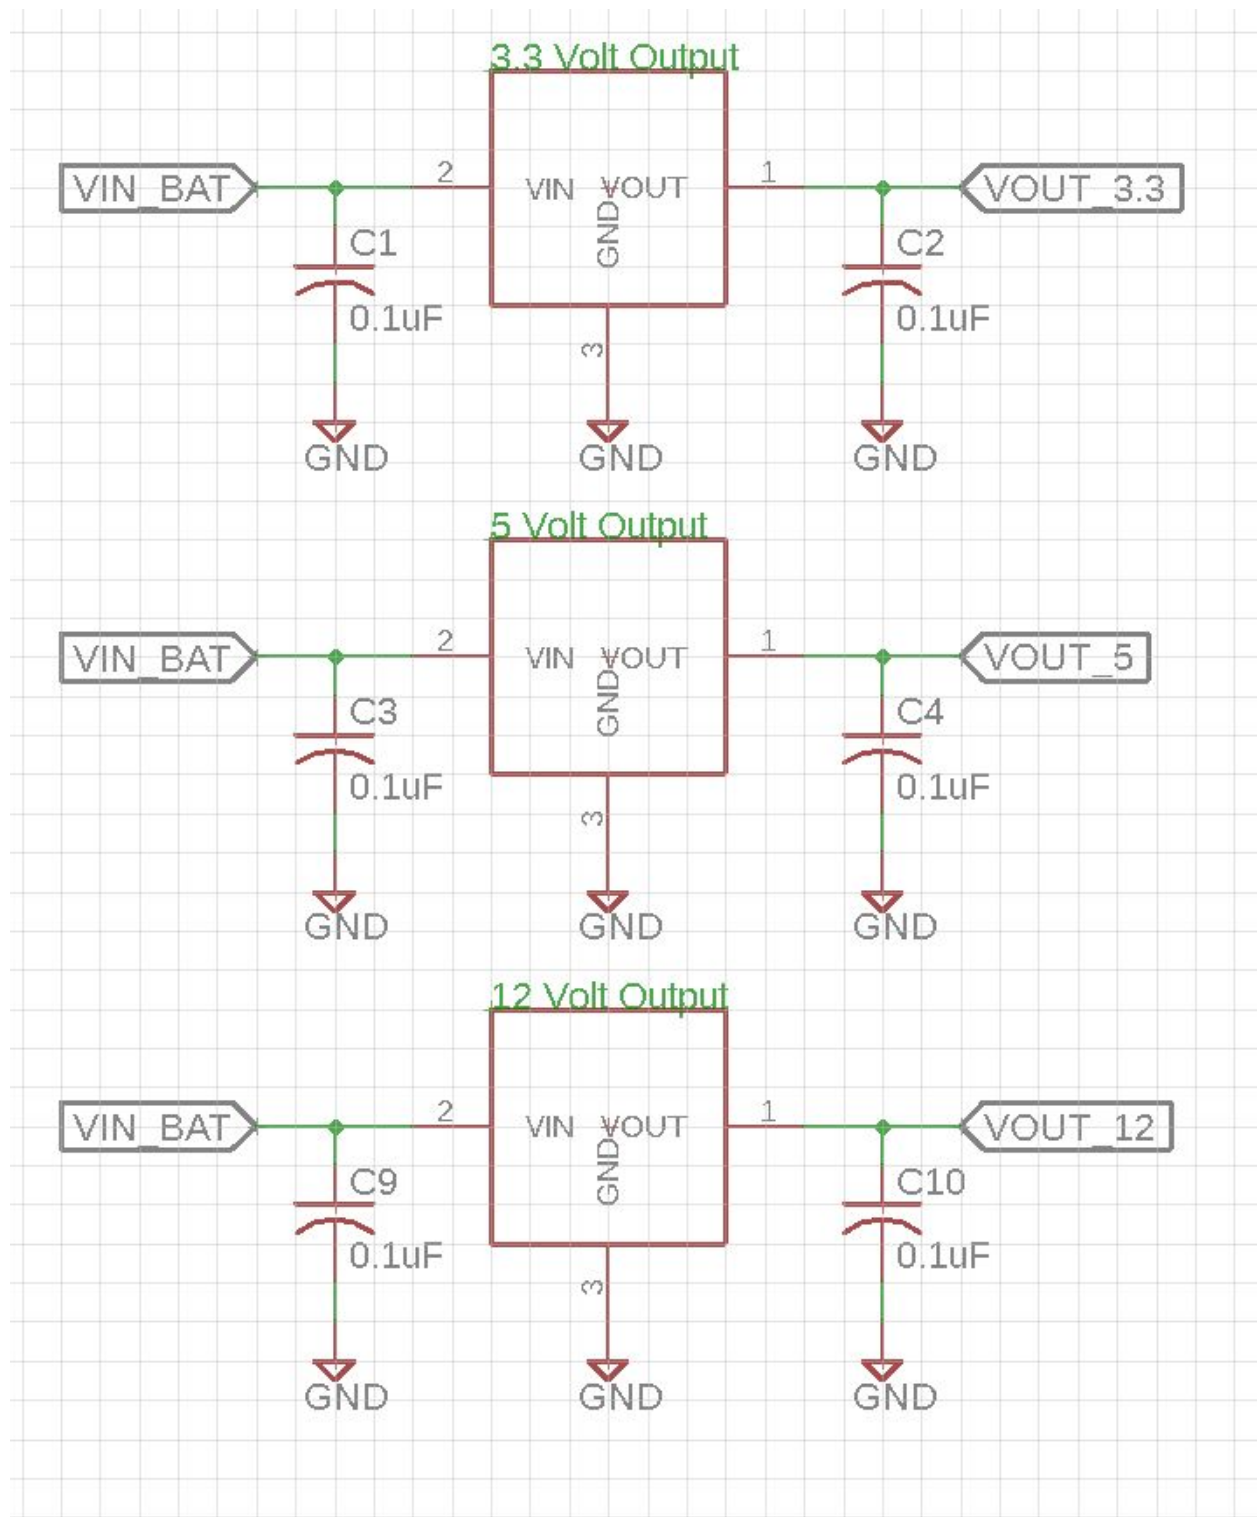


Figure 7. Linear Voltage Regulators (TLV760)

2.2.5 Pump

The off-the-shelf water pump collects water from its surroundings in the fish tank and expels it upwards to the surface to filter through a vegetable garden bed. The overflow from the vegetable bed drips back into the tilapia tank which effectively re-oxygenates the water by breaking the surface tension. For the purposes of testing and our final demonstration, we will bypass the plant bed and pump water directly back into fish tank. The variety of pump that is currently in use operates at about 15W and we are speccing our design to match it.

The microcontroller will take readings from the dissolved oxygen sensor and the 'Run' button in order to operate the pump in 10 minute intervals. In a normal operating condition, all three sensors will take data at the top of the hour. If the dissolved oxygen sensor reading is below our preset threshold of 4 mg/mL, then the microprocessor will send a signal back to the pump to run for ten minutes. A second reading of the three sensors will be taken after the ten minutes is up to determine if the pump needs to run for another 10 minutes or if it can just idle until the next top of the hour. If a 'Run' button press is sensed, then the pump will just run for 10 minutes and no additional sensor data is taken.

2.2.6 pH Sensor

The pH, dissolved oxygen (DO), and temperature are three pillars of aquaponics that are essential to the health of the system [3]. The health of the fish is most sensitive to these three criteria. Many aquaponics resources recommend checking the pH levels at least 3-4 times per week - our sensors alleviate the farmers of the need to physically go to each tank and make these measurements. The pH sensor will communicate with the microcontroller via analog signalling so that its data can then be digitally displayed on the blue-white LCD screen that will be placed on the front side of the sensing kit for easy viewing. The best growing conditions for tilapia are between a pH level of 7.0-7.5 [4]. Therefore, if the hourly measurement indicates a pH reading outside of this range, the LED indicator at the top of the sensing kit will glow red and the LCD display will read high or low. The pH readings will be taken at the top of each hour in addition to any time the 'Test' button is pressed.

2.2.7 Dissolved Oxygen Sensor

For the amount of fish that the farmers are trying to raise per tank, closely monitoring the dissolved oxygen levels in the tank is very important. Since current resources and infrastructure do not allow for frequent water changes, a balance between power usage and operating the water pump must be found based on frequent readings of the DO sensor. The microcontroller communicates to the DO sensor via UART protocol and the operating conditions are given below:

The dissolved oxygen readings (along with the other sensor readings) will be taken on the hour unless a button press is sensed. If the dissolved oxygen level reading is too low (below 4 mg/L [4]), then the pump will run for ten minutes. After, a second reading will be taken and the pump will run or not based on the results. If the manual 'Run' button is pressed on the top of the display, then the pump will just run for 10 minutes and shut off. If the 'Test' button is pressed, then all of the

sensors will take measurements and the water pump will operate as normal based on the conditions that the DO sensor has gathered.

2.2.8 Temperature Sensor

Lastly, it is important to monitor the temperature of the tanks closely and frequently since tilapia are sensitive to their surroundings and will cease eating, breeding, and have a significant increase in mortality from handling outside of certain temperature ranges [4].

2.2.7 Push Button

In addition to taking measurements every hour, the user can refresh the measurements by pushing a button. There will also be a manual button that will turn the pump on or off.

2.2.8 Microcontroller

The ATmega328P-PU microcontroller acts as the brain behind our aquaponics sensing kit. This microcontroller was chosen since it is the basis of the popular Arduino kits. Many of our sensors were chosen such that they work with Arduino/ATmega328P-PU to aid in the success of our overall design due to simplicity and resources available online.

The microcontroller will be used to control our logic for when the pump turns on (either manually through a button push or when the dissolved oxygen sensor reading is too low) and the control of our LED indicator (when any of the three sensors detect pH, DO, or temperature is out of range). The microcontroller will communicate with the dissolved oxygen sensor via UART, the pH sensor with analog signals, and the temperature sensor with 1-Wire. In addition to the LED indicator, the microcontroller will also output onto an LCD display the most recent data readings of the three sensors.

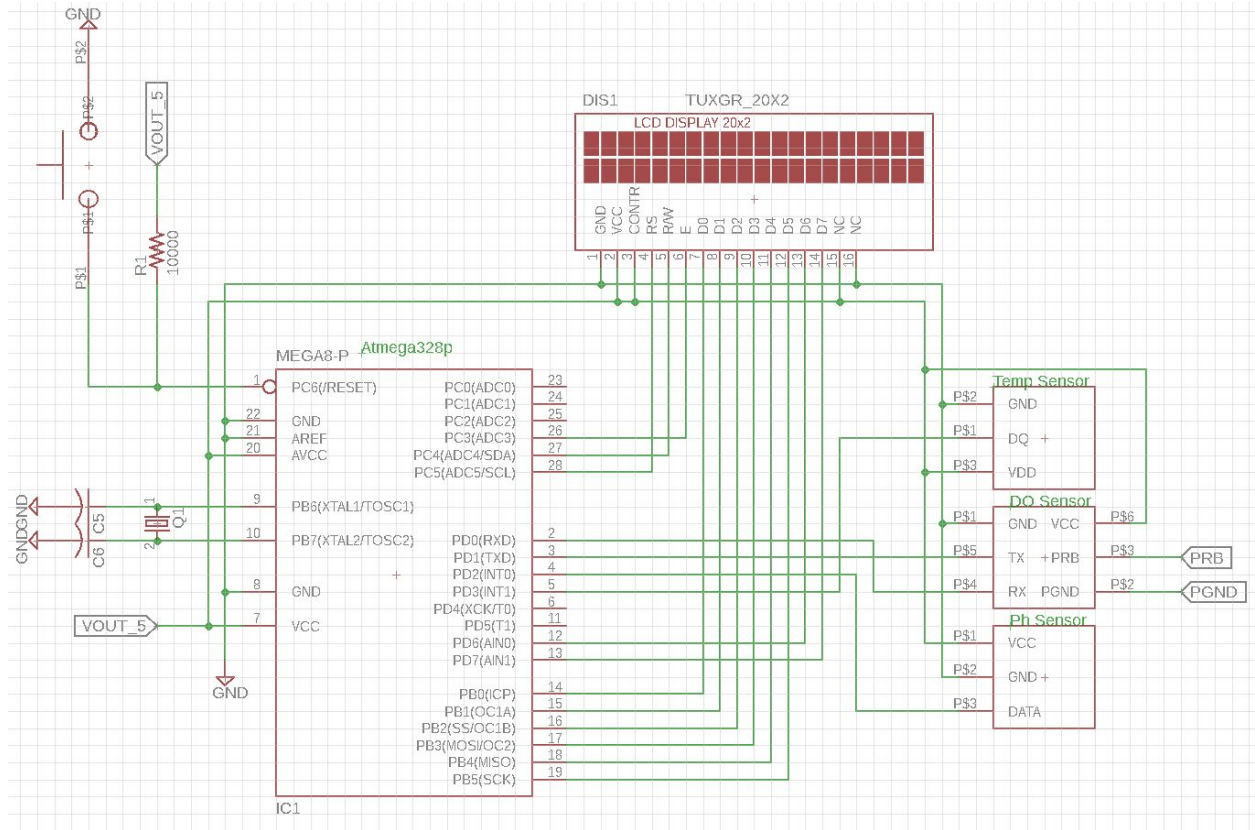


Figure 8. Schematic of Sensors (Microprocessor 2)

2.2.9 LCD Display

The display will act as the main user interface showing the latest measurements taken of pH, dissolved oxygen, temperature, and the time the measurements were taken. It will be also indicate whether measurements are too high or too low.

2.3 Requirements and Verification

2.3.1 Solar Panel

Requirements	Verifications
Solar Panel must provide at least 40W at a minimum of 12V full sunlight	<ol style="list-style-type: none">1. Place solar panel in 111000 Lux sunlight. Check this valuing using a 1% photoresistor.2. Find the maximum power point of this solar panel using a potentiometer and taking a series of voltage and current data<ol style="list-style-type: none">a. Connect solar panel to digital load.b. Perform resistive load sweep from 1 Ohm.3. Check that at least 40W of power is being delivered at the maximum power point.

2.3.2 Battery

Requirements	Verifications
90-120 Wh battery for our system to run at a minimum of 3 continuous hours	<ol style="list-style-type: none">1. Attach battery to a 15W resistive load.2. Monitor for 3 hours and take measurements of current and voltage output every 30 minutes using multimeter.3. Check charge level using a voltmeter and then comparing the voltage levels to the table in the link below. Check that the discharge depth has not exceeded 80%. <p>Voltage vs charge table provided by eMarine Systems [2].</p>

2.3.3 Charge Controller

Requirements	Verifications
Charge controller provides a constant 15V +/-10% at 30W from an input of 10V to 20V and stop charging when the voltage of the battery is at 90% of the maximum charge.	<ol style="list-style-type: none">1. Connect a DC source to the input side of the charge controller and set the input to 10 V.2. Connect a 50% charged battery to the output side of the charge controller.3. Turn on the power supply and the charge controller4. Check that the charge controller stop charging at 90% of the battery charge.5. Repeat for an input of 20V from the source.

2.3.4 Power Converter/Voltage Regulator

Requirements	Verifications
Input: Solar panel 18-12V at 20W (per panel) Output: 5V +/-10% at 0.5W (microcontroller/sensors) and 12V +/-10% at 15W (pump)	<p>For 5V regulator:</p> <ol style="list-style-type: none">1. Attach a 0.5W load.2. Connect oscilloscope across the load3. Input 12V DC to regulator.4. Ensure output remains between 4.5V and 5.5V. <p>For 12V converter:</p> <ol style="list-style-type: none">1. Attach a 15W load.2. Connect oscilloscope across the load.3. Input 12V DC to regulator.4. Ensure output remains between 12.8V and 13.2V.

2.3.5 Microcontroller (ATmega328P-PU)

Requirements	Verifications
<p>Read and interpret sensor data, relay info to UI, and send control signal to pump and display. Must be able to send data through UART at a Baud Rate of 9600 and I2C at a rate of 100kbits/s.</p> <p>The second microcontroller must be able to output a PWM signal.</p>	<p>A: UART verification</p> <ol style="list-style-type: none">1. Connect the microcontroller to a serial terminal.2. Set the Baud rate to be 9600.3. Send and echo back a string of 100 numbers4. Check that numbers match what was sent. <p>B: I2C</p> <ol style="list-style-type: none">1. Connect the two wires up to oscilloscope.2. Send data over I2C at 100kbits/s and check on the oscilloscope that the data send and clock signal is correct. <p>C: PWM</p> <ol style="list-style-type: none">1. Connect the output of the PWM generator pin to an oscilloscope.2. Set the duty ratio of the PWM to be 50%.3. View and verify that the duty ratio is 50% on the oscilloscope.

2.3.6 Pump

Requirements	Verifications
<p>15W, 12V pump must be able to pump water to a minimum height of 0.5 meters</p>	<ol style="list-style-type: none">1. Submerge the pump underwater and connect necessary tubes2. Connect the pump to the power supply with the power supply turned off3. Turn on the power supply and lift the tube 0.5m higher than water level4. Leave the pump on for 1 minute and verify that water is being pumped for at least 1 minutes

2.3.7 pH Sensor

Requirements	Verifications
pH sensor must sense a pH of 0-14 in increments of at least 0.5	<ol style="list-style-type: none">1. Obtain test pH solutions of pH 6.5 , 7, 7.52. Submerge the pH probe in the solutions.3. Check that the pH sensor reading is within 10% of the test pH solution

2.3.8 Dissolved Oxygen Sensor

Requirements	Verifications
Oxygen sensor must be able to detect increases and decreases in oxygen levels in water.	<ol style="list-style-type: none">1. Leave 3 cups of water in the room for 30 minutes so that the temperature and dissolved oxygen levels reach equilibrium.2. Submerge the probe in one of the cups and take the reading of the dissolved oxygen level.3. Shake the second cup of water so that more oxygen dissolves in the water.4. Submerge the probe in the second cup of water and check that the oxygen levels is higher than that of the first cup.5. Dissolve a tablespoon of salt in the third cup and check with the probe that the dissolved oxygen level decreases.

2.3.9 Temperature Sensor

Requirements	Verifications
Temperature sensor must be accurate to within +/- 1 degrees Celsius	<ol style="list-style-type: none">1. Obtain a thermometer and put it into a cup of water at room temperature2. Put temperature probe into the cup of water.3. Check that the two readings agree to within +/- 1 degree Celsius.

2.3.10 LCD Display

Requirements	Verifications
Must clearly display numerical values of pH, dissolved oxygen and temperature and if the values are in range based on the signal from the microcontroller	<ol style="list-style-type: none">1. Turn on the LCD display and display a random string of numbers.2. Verify that the numbers can be read at a typical reading distance away. (15in)

2.3.11 LED Indicator light

There will be a red indicator light that will turn on when any measured value is out of acceptable range to alert the user of an imbalance.

Requirements	Verifications
Must turn red when sensor values are outside of tolerance ranges and flash red when they are significantly outside of tolerance ranges. Otherwise, light will be off.	<ol style="list-style-type: none">1. Submerge the pH probe in a solution such that the readings would be outside the tolerance range. Eg. pH of 6.52. Check that the red LED is on and can be seen from 1m away.

2.3.12 Push Button

Requirements	Verifications
Button should be a short circuit when pressed and open circuit when not pressed.	<ol style="list-style-type: none">1. Use a multimeter in continuity mode.2. Check that the button is a short circuit when pressed and open circuit when not pressed.
Button should be debounced.	<ol style="list-style-type: none">1. Connect a resistor in series and a DC source across both the button and the resistor.2. Connect the button to an oscilloscope.3. Press the button and see that the signal has a smooth transition.

2.4 Tolerance Analysis

Since the motivation behind this project was to be able to accurately and easily measure various conditions of the water in the tilapia farm, a tolerance analysis was performed on the most expensive sensor that would be used: the dissolved oxygen sensor. This sensor is the most expensive single component in our design so we chose to test its accuracy and gain further familiarity with it. Additionally, the results obtained by the DO sensor would be crucial to our logic for controlling when the water pump turns on and off during the daytime and at night. As such, the reliability of this sensor is of utmost importance such that we do not drain the battery of our solar-powered system.

The galvanic dissolved oxygen probe consists of a polyethylene membrane, an anode, and a cathode. The oxygen molecules in solution cross through the membrane and are reduced at the cathode where a small voltage is produced. The more oxygen that is present in solution, the more mV output there is. The DO sensor can also be used to detect the oxygen content in gases. This principle is useful when solving for our dissolved oxygen saturation level. Equation 1 is used to convert the measured voltage in water to a percent saturation. From there, the mg/L of DO in water can be found by referencing a solubility table (Figure 5). The Percent Saturation of Dissolved Oxygen depends on the temperature of the water and elevation of the water testing site [5]. In Champaign, IL at an altitude of 764', a correction factor of 0.9727 is applied to the table.

Solubility: Amount of DO that distilled water can hold at a given temperature

Temp. (C)	Solubility (mg/L)
0	14.6
1	14.2
2	13.8
3	13.5
4	13.1
5	12.8
6	12.5
7	12.2
8	11.9
9	11.6
10	11.3
11	11.1
12	10.9
13	10.6
14	10.4
15	10.2
16	10.0
17	9.8
18	9.6
19	9.4
20	9.2

Figure 9. Solubility of Water Table [6]

$$Saturation (\%) = \left(\frac{mV \text{ in } H_2O}{mV \text{ in air}} \right) * 100 \quad (1)$$

The DO sensor detected 47 mV in the air. We took the measurements listed below in Table 1. The water was sourced from a water fountain and the sink in the ECE 445 Senior Design lab. We assume that the temperature of both sources was 10°C.

Table 1. Testing of Dissolved Oxygen Probe

Test Number	Source of H ₂ O, Amount Shaken (sec)	Voltage in H ₂ O (mV)	Dissolved Oxygen Saturation (%)	Dissolved Oxygen (mg/L)
1	Fountain, 0	25	53.19	5.84
2	Fountain, 5	31	65.36	7.24
3	Fountain, 25	42	89.36	9.81
4	Fountain, 0	30	42.55	4.67
5	Fountain, 5	33	70.21	7.71
6	Fountain, 25	43	91.48	10.04
7	Sink, 0	17	36.17	3.97
8	Sink, 5	40	85.10	9.34
9	Sink, 25	45	95.74	10.51

Ultimately, we gathered that the dissolved oxygen sensor is precise enough such that it detects oxygen added to water by disturbances. It verifies our oxygenation method's effectiveness in producing discernible changes in dissolved oxygen concentrations. Given these observations, we can verify that our sensor is effective and stays within tolerance given controlled operating temperatures. For operation in Kenya, will we need to make readings based on the assumption that temperature will be approximately 30°C. Figure 9 demonstrates the relationship between temperature and dissolved oxygen in water, which will be the basis for our analysis. Operation significantly beyond this temperature range does not guarantee the same level of accuracy. Additionally, the altitude of Kenya is at 5197' which means a correction factor of 0.826 needs to be applied to the solubility values in Figure 9.

3 Cost and Schedule

3.1 Cost Analysis

Labor

Name	Hourly Rate	Hours per Week	Cost for 16 Weeks x 2.5
Shannon Kuruc	\$30	15	\$18,000
Emily Wang	\$30	15	\$18,000
Tony Xiao	\$30	15	\$18,000
Total	\$54,000		

Parts List

Description	Brand	Quantity	Retailer	Cost	Total
Solar Panels	ALEKO	3	Amazon	33.99	101.97
Temperature Sensor	Dallas Semiconductor	1	Sparkfun	9.95	9.95
DO Kit	Atlas Scientific	1	Sparkfun	249.95	249.95
pH Sensor	DFRobot	1	DFRobot	29.50	41.50
LCD Display	RioRand	1	Amazon	7.99	7.99
Battery	Dakota Lithium	1	Dakota Lithium	99.99	114.00
Microcontroller	Atmel	2	Amazon	5.66	11.32
Testing Tank	N/A	1	N/A	0.00	0.00
Waterproof Housing for Electronics	N/A	1	Machine Shop	20.00	20.00
Buttons (2)	PP-NEST	1	Amazon	8.99	8.99
Power converter	N/A	2	Amazon	10.00	20.00
Crystal oscillator	Mouser Electronics	1	Mouser	1.00	1.00
Other	N/A	N/A	N/A	20.00	20.00
Total	606.67				

Grand Total

Labor	Parts	Total
\$54,000	\$554.66	\$54,572.66

3.2 Schedule

Week	Shannon	Emily	Tony
2/11/18 - 2/17/18	Mock Design Document: Add/edit Introduction, Cost and Schedule, Requirements and verification, Block Descriptions Schematic	Mock Design Document: Add/edit Schedule, Ethics and Safety, Cost and Schedule, Schematic, R&V	Mock Design Document: Add/edit Block Diagram, Physical Design, Cost and Schedule, Schematic
2/18/18 - 2/24/18	Complete the design requirements and verification	Schedule, unit drawings and mockup, find data sheets for sensors used, research microcontroller	Work on schematic for design and linear regulators
2/25/18 - 3/3/18	Solar panel verification Prepare for design review	Prototype sensing unit on Arduino Prepare for design review	Battery verification Prepare for design review
3/4/18 - 3/10/18	Begin PCB design Solar panel + battery charge test	Debug prototype sensing unit on Arduino with working LCD display and switches	Debug prototype sensing unit on Arduino with working LCD display and switches
3/11/18 - 3/17-18	Finish and order PCB design Begin building charge controlling circuit hardware Build voltage regulators	Begin development on ATmega328P-PU for sensing unit	Complete prototype sensing unit on Arduino with working LCD display and switches Development on ATmega328P-PU
3/18/18 - 3/24/18 (Spring break)	Solar unit/voltage regulator load tests (for 12V and 3.3V)	Continue sensing unit microcontroller programming	Build charge controlling sensing unit Develop charge controller on microcontroller
3/25/18 - 3/31/18	Solder and assemble PCB	Finalize sensing control unit Test sensing control unit	Test charging control unit
4/1/18 - 4/7/18	Total system tests	Test sensing control unit	Test charging control unit
4/8/18 - 4/14/18	Systems integration and environmental testing	Systems integration and environmental testing	Systems integration and environmental testing

4/15/18 - 4/21/18	Final environmental testing of integrated unit	Begin final presentation	Begin report
4/22/18 - 4/28/18	Finish final presentation Finalize final report Practice presentation	Finish final presentation Finalize final report Practice presentation	Finish final presentation Finalize final report Practice presentation
4/29/18 - 5/1/18	Presentation	Presentation	Presentation

4 Ethics and Safety

4.1 Risk Analysis

The very nature of this water-based project poses some risks to the safety and completion of the project. We suspect that the most difficult part of this project would be the system integration and programming the embedded system to interface with the sensors. Additionally, we anticipate some added difficulty with the following:

- Embedded systems programming
- Systems integration
- Sensor compatibility

Another concern is testing our system using solar power. Majority of our development time is taking place during winter and early spring, when sun intensity and day length is limited. We are concerned that we will not be able to generate enough stored power to power the system.

One aspect not part of electrical engineering that may give us trouble is the water chemistry. We are trying to increase the dissolved oxygen levels through the splashing of water when we pump the water up into the trough where the plants grow. We might not be able to reach our target oxygen levels without using an actual oxygenator. The current system in Kenya uses this oxygenation method over a mechanical oxygenator.

4.2 Safety

Our project is designed to take measurements from a large tank of water. There are inherent safety concerns with any type of electronics equipment in water, including but not limited to moisture damage to components or electrocution.

There are a variety of hazards associated with lithium-ion battery use. This includes overcharging, overheating, and mechanical abuse [7]. Overcharging is the most serious hazard, however it is the least likely. We would need to implement safeguards such as an automatic shut off when the temperature is too high. We also need to consider mechanical abuse, as your average Kenyan does not know proper battery safety and disposal. Lilly expressed his concerns with batteries, however it is necessary for our project and the Living Positive Kenya facility is a controlled environment.

Generally, we are concerned with the impact of electronic equipment being disposed of improperly and toxins making their way into the environment. This potentially violates IEEE Code of Ethics #1: “to hold paramount the safety, health, and welfare of the public, to strive to comply with ethical design and sustainable development practices, and to disclose promptly factors that might endanger the public or the environment”.

4.3 Ethics

A potential concern is with introducing this equipment is damage to the environment and people. IEEE Code of Ethics 7.8.5 states that the intent is “to improve the understanding by individuals and society of the capabilities and societal implications of conventional and emerging technologies, including intelligent systems;”. Our intention is to empower and support individuals in their health. Introducing lithium ion batteries potentially violates 7.8.1 of IEEE Code of Ethics in terms of sustainability.

There are also ethical concerns with animal farming of any sort. However, our intent is to build a system that supports sustainable, humane farming to serve a group of people in need.

5 Citations

- [1] Data.worldbank.org. (2018). *Kenya / Data*. [online] Available at: <https://data.worldbank.org/country/kenya> [Accessed 7 Feb. 2018].
- [2] Emarineinc.com. (2018). *Battery Maintenance 101*. [online] Available at: <https://www.emarineinc.com/Batteries-Maintenance-101> [Accessed 18 Feb. 2018].
- [3] Bernstein, S. (2011). *Aquaponic gardening*. Gabriola, B.C.: New Society Publishers.
- [4] Tilapia-farming.com. (2018). *Environment Conditions for Raising Tilapia / Tilapia Farming*. [online] Available at: <http://www.tilapia-farming.com/2012/12/09/environment-conditions-for-raising-tilapia/> [Accessed 7 Feb. 2018].
- [5] k12science.org. (2018). *Dissolved Oxygen Percent Saturation*. [online] Available at: <http://www.k12science.org/curriculum/waterproj/saturation/> [Accessed 22 Feb. 2018].
- [6] Dep.wv.gov. (2018). *DO Saturation*. [Online]. Available: <http://dep.wv.gov/WWE/getinvolved/sos/Documents/SOSKit/DOSaturation.pdf>. [Accessed 23 Feb. 2018].
- [7] Sites.ieee.org. (2018). *A Guide to Lithium Ion Battery Safety*. [online] Available at: <http://sites.ieee.org/pes-essb/files/2016/06/2015-WM-PN-A-Guide-to-Lithium-ion-safety-Jim-McDowall.pdf> [Accessed 7 Feb. 2018].