

# NannyBot for Robots Developing to Walk

Chulwon Choi, Alejandro Diaz De Argandona Araujo, Karthikeyan Sundaram

TA: Vassily Petrov

## 1. Introduction

### 1.1 Objective

All around the world, humanoid robots are being developed. The development of humanoids robots is natural and important, as they are made to do things instead of humans. Humanoids can be used to venture into dangerous places, or check if some place is safe for humans to traverse. An essential part of a humanoid robot is its walking system. A common way to teach robots to walk is through reinforcement learning. Using reinforcement learning, the robots try to walk, fail, and learn from their failures and try in different ways until they are able to walk at last. Naturally, this requires many trials and errors. The errors mean that robots will inevitably fall many times, and require to be stood back up, either by a person's help, or by a machine, or by its own strength. However, not all robots can stand by itself, and machines that help robots up must be pre-installed in the place, so could be restricted by the environment. The human help is the most reliable, but it is tedious, and could be dangerous if the robot learning to walk is of a human size.

Professor Kim Joohyung pitched the idea to build a robot that will do this job for the people. Our goal is to build a wheeled robot that can be controlled by a human, but do the heavy lifting for the human. The robot we intend to build is will be for small robots learning to walk, whose size is around 30cm\*30cm\*50cm, and maximum weight is 5kg. Our robot is meant to be a prototype, which, if it works well, Professor Kim will look into making ones for bigger robots.

### 1.2 Background

Throughout the world, many companies are developing humanoids and walking robots for various purposes. These companies include Google, UBTech, Boston Dynamics, and much more. These robots are not limited to small sizes, but include human sized robots as well, or even larger robots. For larger robots, falling is an even bigger problem, because the extra weight they have means that they will hit the ground harder when they fall. Naturally, the issue of robots falling has been studied thoroughly already. Many robots can detect themselves falling, and some can even react to prevent themselves from falling. Some places have machinery pre-installed to recover the robot after it falls. Some robots are built to reduce fall damage, and some robots can stand back up by itself to continue walking. However, not all robots have these features, and it's also possible people test the robot where robot fall prevention machineries are not pre-installed. Highly expensive

robots could be damaged if a fall prevention system fails to work, and if the robot is large, people could get hurt while trying to get the robot back up. Our robot is meant to prevent the falling of the robot by having straps attached to our NannyBot, which will detect the robot falling, and pull the robot back up when it does fall. This NannyBot won't require pre-installing, and be able to function anywhere with the robot so long as it has power. It will be compatible with almost all walking robots of a certain size. made possible by using different harness for different shapes of robots.

### 1.3 Physical Design

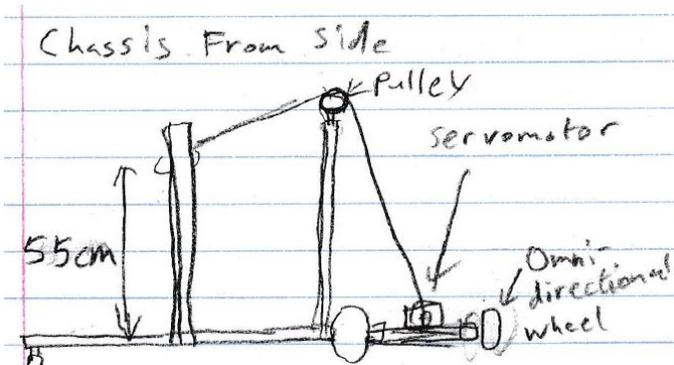
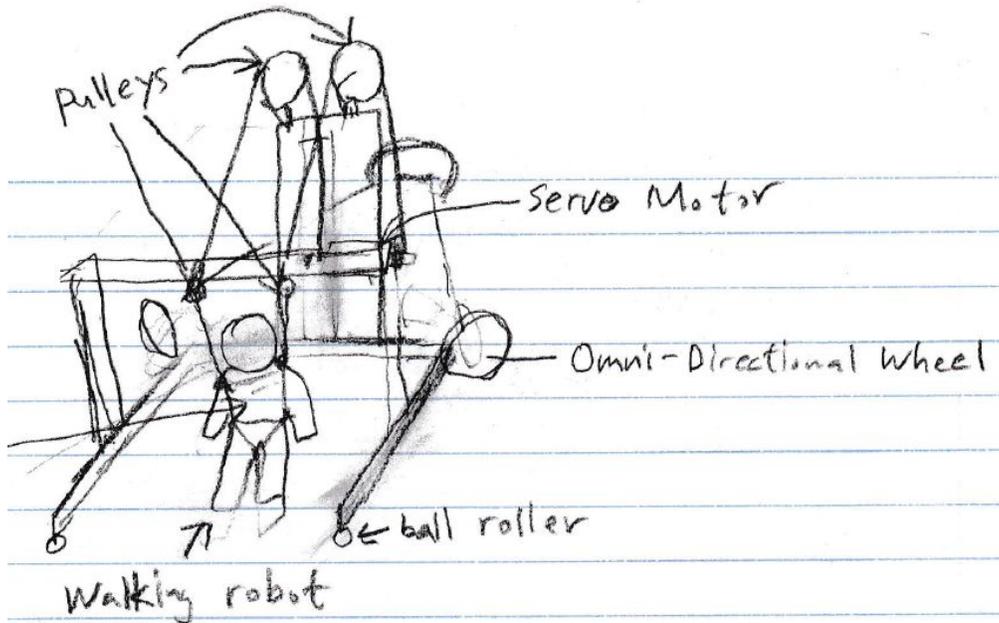


Figure 1

The figure 1 shows the physical design of the Nannybot from various viewpoints. The NannyBot is composed of a Chassis, a pickup system, and a pair of legs that stretch out to the sides of the walking robot. The legs help distribute weight when the walking robot is lifted, and also act as a place to put supports for the pulleys that pull the walking robot up. They are 80cm apart so that the walking robot has room to move and doesn't hit the NannyBot. The Chassis has 3 omni-directional wheels and has a triangular formation that allows it to travel in all directions. A servo motor is used to pull the strings laid over the pulleys to lift the walking robot. It is placed on the Chassis, so that the center of mass of the NannyBot stays low.

#### **1.4 High-level requirements list**

- NannyBot must be able to follow a Robotis OP2 under the user's control, which has a velocity of 24cm/sec.
- NannyBot must be able to lift a Robotis OP2, which weighs 3kg.
- NannyBot must be able to carry the Robotis OP2 and travel at least 4m.

## **2. Design**

### **2.1 Block Diagram**

We will use a microcontroller to send PWM signals to the 3 DC Geared motors and 1 servo motor. The microcontroller will be connected to a Joystick and 2 buttons. The signals sent to the motors will be determined by the signal from the joystick and the buttons. The PWM signals will tell the motors how fast they need to turn, and in what direction they must turn.

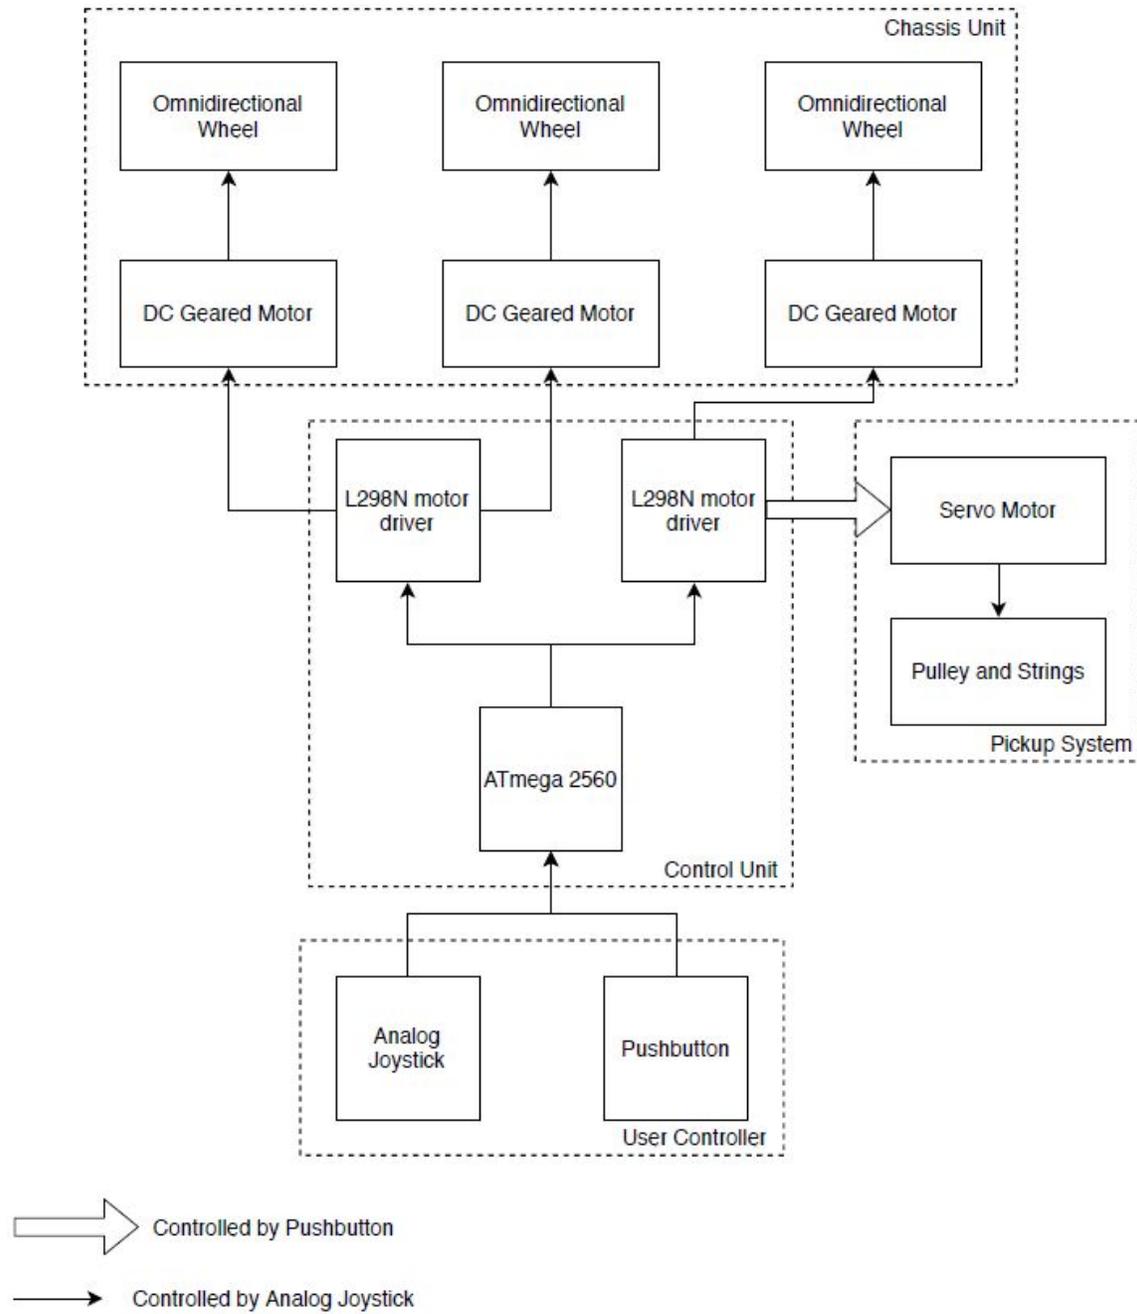


Figure 2

## **2.1 Functional Overview and Block Requirements**

### **2.1.1 Control Unit**

#### 2.1.1.1 ATmega 2560 Microcontroller

For this project we are using 3 DC geared motors and 1 servo motor. In order to control the direction and speed of the motors, we need a microcontroller that has at least 2 PWM pins for each motor. This leads to a total of 8 PWM pins. Further, we are trying to integrate a User's controller for this project, we would need at least 2 Analog Input pins for the analog joystick and we also need at least 1 Digital I/O pin for the pushbutton. After taking these requirements into consideration, we decided to make use of the ATmega 2560 microcontroller. This microcontroller has 15 PWM pins, 54 Digital I/O pins and 16 Analog Input pins.

#### 2.1.1.2 L298N Motor Driver

Most microcontrollers, including the ATmega 2560, do not have the capabilities to provide the power that is needed to drive the motors. Further, they are not safeguarded by the back emf that could be created during the functioning of the motors. Therefore, it is necessary to include a motor driver between the microcontroller and the motor. The L298N motor driver has a power rating of 25W and this would be sufficient to drive the motors.

### **2.1.2 Chasis**

#### 2.1.2.1 DC Geared Motor

3 DC Geared motors will receive signals from the control unit and be used to turn the 3 omni-directional wheels to move the Chassis in any direction. The gear assembly will allow us to reduce speed and increase torque of the wheels.

Requirement 1: The 3 motors must be able to make the Chassis able to travel at least 24cm/sec.

Requirement 2: The 3 motors must be able to make the Chassis travel 4m while carrying 3kg of additional weight.

#### 2.1.2.2 Omni-Directional Wheels

3 Omni-directional wheels will be used to allow movement in all directions. They are spun by the DC Gear motors.

Requirement: They must be able to travel in all directions.

### 2.1.2.3 Chassis

The 3 omni-directional wheels will be installed in a triangular fashion, allowing movement in any direction. The Chassis will have 2 bars to the front, helping weight distribution and acting as support for pickup system's pulleys.

Requirement: The legs must be 80cm wide, and 80cm long so as to not disturb the movement of the walking robot.

### 2.1.2.4 Ball Rollers

A ball roller will be attached to the end of each leg of the Chassis to help weight distribution, so that the NannyBot doesn't tilt or fall over when it lifts the walking robot.

Requirement: The ball rollers must not impede the movement of the Chassis.

## **2.1.3 Pickup System**

### 2.1.3.1 Servo Motor

A servo motor will be installed on the Chassis, and connected to 2 strings. These strings each go through a set of pulleys to and are connected to the walking robot's harness. The motor reels in the strings to lift the walking robot up when the signal is given from the control unit. 2 strings were used so that the walking robot doesn't spin in the air when it is lifted.

Requirement: The servo motor must be able to pull at least 5kg off the ground.

### 2.1.3.2 Pulleys

4 pulleys will be used to lay the strings from the servo motor to the robot above the robot's head. There are 2 sets of 2 pulleys, and there is a string going through each set. The 2 strings bring the walking robot up

Requirement 1: Pulleys must not impede the string movement

Requirement 2: Pulleys must be strong enough to withstand 5kg of weight.

### 2.1.3.3 Strings

2 strings are used to connect the servo motor and the walking robot. Using pulleys, the strings one end of the strings are attached to the walking robot's harness from above. When the servo motor turns, the strings are reeled in, thereby lifting the robot via the harness and strings.

Requirement 1: Strings must be long enough to reach the robot, and give it some slack.

Requirement 2: String must be strong enough to withstand at least 3kg of weight.

## **2.5 Risk Analysis**

Since we are going to design two modules for our project, the movable wheeled structure that follows the walking robot and the servo that pulls the strings to lift the walking robot, one of the main problems could be to effectively integrate both of them into a single structure.

For the wheeled structure, one of the main problems we will have to address is to be able to follow the walking robot without interfering with its regular walk. Firstly, we are going to move the NannyBot with human interaction by using a remote control with a joystick. In the future, if we accomplish our basic goals, we will try to introduce sensors to the NannyBot so that it can be autonomous and that human interaction is no longer needed.

However, the main problem we have to face is to lift the walking robot effectively without harming it or interfering with its walking. For that reason, we will design a specific harness for the walking robot that is attached to two lifting points that will be placed on the shoulders of the robot. By doing that, we can create a universal NannyBot that can work with different walkingbots and the only thing we will need to change is the specific harness for the walking robot.

All these problems represent the challenges and risks to the successful completion of the project. If at some point we are stuck with some of those problems, we would try to focus on the main goals: to lift the walking robot with the help of the NannyBot.

## **3. Ethics and safety**

As engineers from the University of Illinois at Urbana-Champaign, we are committed to creating a project that is aligned with the values of the IEEE and ACM Code of Ethics. For that reason, these are our main ethical statements:

We will work in a safe environment in which we can avoid harm to any of the group members or other people while working. We all have completed the laboratory training and we are aware of the risks that working in a project with machines and electricity imply.

We are going to be honest about our work and results. We are going to respect the ideas and inventions of others, and in case we use an idea that does not belong to us we will mention the original author with a proper citation.

We want to maintain high standards of professional competence, conduct, and ethical practice. We will learn the technical knowledge required to develop the project and we will upgrade our skills through independent study, attending conferences with professors, and asking experts on the matter.