


Programming Languages and Compilers (CS 421)



Dennis Griffith
0207 SC, UIUC

<http://www.cs.illinois.edu/class/cs421/>

Based in part on slides by Mattox Beckman, as updated by Vikram Adve, Gul Agha, and Dennis Griffith



Lambda Calculus - Motivation

- Aim is to capture the essence of functions, function applications, and evaluation
- λ -calculus is a theory of computation
- “The Lambda Calculus: Its Syntax and Semantics”. H. P. Barendregt. North Holland, 1984



Lambda Calculus - Motivation

- All *sequential programs* may be viewed as functions from input (initial state and input values) to output (resulting state and output values).
- λ -calculus is a mathematical formalism of functions and functional computations
- Two flavors: typed and untyped



Untyped λ -Calculus

- Only three kinds of expressions:
 - Variables: x, y, z, w, \dots
 - Abstraction: $\lambda x. e$
(Function creation, think `fun x -> e`)
 - Application: $e_1 e_2$



Untyped λ -Calculus Grammar

- Formal BNF Grammar:

- $\langle \text{expression} \rangle ::= \langle \text{variable} \rangle$
 - | $\langle \text{abstraction} \rangle$
 - | $\langle \text{application} \rangle$
 - | $(\langle \text{expression} \rangle)$

- $\langle \text{abstraction} \rangle$

- $::= \lambda \langle \text{variable} \rangle . \langle \text{expression} \rangle$

- $\langle \text{application} \rangle$

- $::= \langle \text{expression} \rangle \langle \text{expression} \rangle$



Untyped λ -Calculus Terminology

- **Occurrence**: a location of a subterm in a term
- **Variable binding**: $\lambda x. e$ is a binding of x in e
- **Bound occurrence**: all occurrences of x in $\lambda x. e$
- **Free occurrence**: one that is not bound
- **Scope of binding**: in $\lambda x. e$, all occurrences in e not in a subterm of the form $\lambda x. e'$ (same x)
- **Free variables**: all variables having free occurrences in a term



Example


- Label occurrences and scope:

$$(\lambda x. \lambda y. y (\lambda x. x y) x) x$$



Example

- Label occurrences and scope:

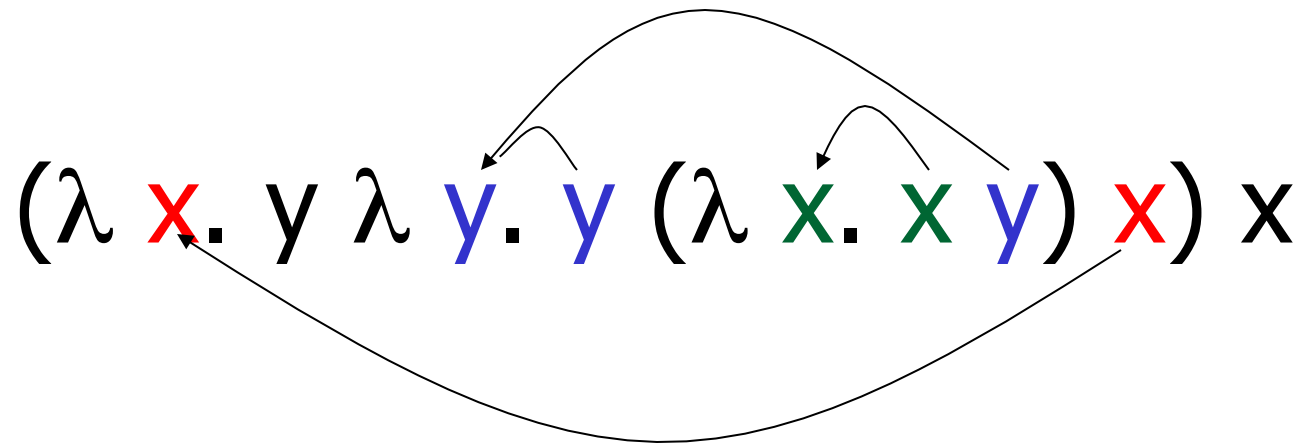



Untyped λ -Calculus

- How do you compute with the λ -calculus?
- Roughly speaking, by substitution:
- $(\lambda x. e_1) e_2 \Rightarrow e_1 [e_2 / x]$
- Modulo all kinds of subtleties to avoid free variable capture



Transition Semantics for λ -Calculus

$$\frac{E \rightarrow E''}{E E' \twoheadrightarrow E'' E'}$$

- Application (version 1 - Lazy Evaluation)

$$(\lambda x . E) E' \twoheadrightarrow E[E'/x]$$

- Application (version 2 - Eager Evaluation)

$$\frac{E' \twoheadrightarrow E''}{(\lambda x . E) E' \twoheadrightarrow (\lambda x . E) E''}$$

$$\frac{}{(\lambda x . E) V \twoheadrightarrow E[V/x]}$$

V - variable or abstraction (value)



How Powerful is the Untyped λ -Calculus?

- The untyped λ -calculus is Turing Complete
 - Can express any sequential computation
- Problems:
 - How to express basic data: booleans, integers, etc?
 - How to express recursion?
 - Constants, `if_then_else`, etc, are conveniences; can be added as syntactic sugar



Typed vs Untyped λ -Calculus

- The *pure* λ -calculus has no notion of type: $(f f)$ is a legal expression
- Types restrict which applications are valid
- Types are not syntactic sugar! They disallow some terms
- Simply typed λ -calculus is less powerful than the untyped λ -Calculus: NOT Turing Complete (no recursion)



Uses of λ -Calculus

- Typed and untyped λ -calculus used for theoretical study of sequential programming languages
- Sequential programming languages are essentially the λ -calculus, extended with predefined constructs, constants, types, and syntactic sugar

- Ocaml is close to the λ -Calculus:

$$\begin{aligned} \text{fun } x \text{ -> } \text{exp} & \text{ --> } \lambda x. \text{exp} \\ \text{let } x = e_1 \text{ in } e_2 & \text{ --> } (\lambda x. e_2) e_1 \end{aligned}$$



α Conversion

- α -conversion:

$$\lambda x. e \xrightarrow{\alpha} \lambda y. (e [y/x])$$

- Provided that

1. y is not free in e
2. No free occurrence of x in e becomes bound in e when replaced by y

α Conversion Non-Examples

1. Error: y is free in term

$$\lambda x. x y \not\rightarrow_{\alpha} \lambda y. y y$$

2. Error: free occurrence of x becomes bound in wrong way when replaced by y

$$\lambda x. \underbrace{\lambda y. x y}_e \not\rightarrow_{\alpha} \lambda y. \underbrace{\lambda y. y y}_{e[y/x]}$$

But $\lambda x. (\lambda y. y) x \rightarrow_{\alpha} \lambda y. (\lambda y. y) y$

And $\lambda y. (\lambda y. y) y \rightarrow_{\alpha} \lambda x. (\lambda y. y) x$



Congruence

- Let \sim be a relation on lambda terms. \sim is a **congruence** if
- it is an equivalence relation
- If $e_1 \sim e_2$ then
 - $(e e_1) \sim (e e_2)$ and $(e_1 e) \sim (e_2 e)$
 - $\lambda x. e_1 \sim \lambda x. e_2$



α Equivalence

- α equivalence is the smallest congruence containing α conversion
- One usually treats α -equivalent terms as equal - i.e. use α equivalence classes of terms



Example

Show: $\lambda x. (\lambda y. y x) x \sim_{\alpha} \lambda y. (\lambda x. x y) y$

■ $\lambda x. (\lambda y. y x) x \dashrightarrow_{\alpha} \lambda z. (\lambda y. y z) z$ SO

$\lambda x. (\lambda y. y x) x \sim_{\alpha} \lambda z. (\lambda y. y z) z$

■ $(\lambda y. y z) \dashrightarrow_{\alpha} (\lambda x. x z)$ SO

$(\lambda y. y z) \sim_{\alpha} (\lambda x. x z)$ SO

$\lambda z. (\lambda y. y z) z \sim_{\alpha} \lambda z. (\lambda x. x z) z$

■ $\lambda z. (\lambda x. x z) z \dashrightarrow_{\alpha} \lambda y. (\lambda x. x y) y$ SO

$\lambda z. (\lambda x. x z) z \sim_{\alpha} \lambda y. (\lambda x. x y) y$

■ $\lambda x. (\lambda y. y x) x \sim_{\alpha} \lambda y. (\lambda x. x y) y$



Substitution

- Defined on α -equivalence classes of terms
- $P [N / x]$ means replace every free occurrence of x in P by N
 - P called *redex*; N called *residue*
- Provided that no variable free in P becomes bound in $P [N / x]$
 - Rename bound variables in P to avoid capturing free variables of N



Substitution

- $x [N / x] = N$
- $y [N / x] = y$ if $y \neq x$
- $(e_1 e_2) [N / x] = ((e_1 [N / x]) (e_2 [N / x]))$
- $(\lambda x. e) [N / x] = (\lambda x. e)$
- $(\lambda y. e) [N / x] = \lambda y. (e [N / x])$
provided $y \neq x$ and y not free in N
 - Rename y in redex if necessary



Example

$$(\lambda y. y z) [(\lambda x. x y) / z] = ?$$

- Problems?

- z in redex in scope of y binding
- y free in the residue

- $(\lambda y. y z) [(\lambda x. x y) / z] \xrightarrow{\alpha} (\lambda w. w z) [(\lambda x. x y) / z] = \lambda w. w (\lambda x. x y)$




Example

- Only replace free occurrences
- $(\lambda y. y z (\lambda z. z)) [(\lambda x. x) / z] =$
 $\lambda y. y (\lambda x. x) (\lambda z. z)$

Not

$$\lambda y. y (\lambda x. x) (\lambda z. (\lambda x. x))$$



β reduction

- β Rule: $(\lambda x. P) N \xrightarrow{\beta} P [N / x]$
- Essence of computation in the lambda calculus
- Usually defined on α -equivalence classes of terms



Example

- $(\lambda z. (\lambda x. x y) z) (\lambda y. y z)$

- $--\beta--> (\lambda x. x y) (\lambda y. y z)$

- $--\beta--> (\lambda y. y z) y --\beta--> y z$

- $(\lambda x. x x) (\lambda x. x x)$


- $--\beta--> (\lambda x. x x) (\lambda x. x x)$

- $--\beta--> (\lambda x. x x) (\lambda x. x x) --\beta--> \dots$



α β Equivalence

- α β equivalence is the smallest congruence containing α equivalence and β reduction
- A term is in *normal form* if no subterm is α equivalent to a term that can be β reduced
- Hard fact (Church-Rosser): if e_1 and e_2 are $\alpha\beta$ -equivalent and both are normal forms, then they are α equivalent



Order of Evaluation

- Not all terms reduce to normal forms
- Not all reduction strategies will produce a normal form if one exists




Lazy evaluation:

- Always reduce the left-most application in a top-most series of applications (i.e. Do not perform reduction inside an abstraction)
- Stop when term is not an application, or left-most application is not an application of an abstraction to a term



Example 1

- $(\lambda z. (\lambda x. x)) ((\lambda y. y y) (\lambda y. y y))$
- Lazy evaluation:
- Reduce the left-most application:
- $(\lambda z. (\lambda x. x)) ((\lambda y. y y) (\lambda y. y y))$
 $\xrightarrow{\beta} (\lambda x. x)$




Eager evaluation

- (Eagerly) reduce left of top application to an abstraction
- Then (eagerly) reduce argument
- Then β -reduce the application



Example 1

- $(\lambda z. (\lambda x. x))((\lambda y. y y) (\lambda y. y y))$
- Eager evaluation:
- Reduce the left of the top-most application to an abstraction: Done.
- Reduce the argument:
- $(\lambda z. (\lambda x. x))((\lambda y. y y) (\lambda y. y y))$
-- β --> $(\lambda z. (\lambda x. x))((\lambda y. y y) (\lambda y. y y))$
-- β --> $(\lambda z. (\lambda x. x))((\lambda y. y y) (\lambda y. y y))...$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta} \dots$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Lazy evaluation:

$(\lambda x. \boxed{x} \boxed{x})((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Lazy evaluation:

$(\lambda x. \boxed{x} \boxed{x})((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$\boxed{((\lambda y. y y) (\lambda z. z))} \boxed{((\lambda y. y y) (\lambda z. z))}$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. \boxed{y} \boxed{y}) \underline{(\lambda z. z)}) ((\lambda y. y y) (\lambda z. z))$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. \boxed{y} \boxed{y}) \underline{(\lambda z. z)}) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} (\boxed{(\lambda z. z)} \boxed{(\lambda z. z)})((\lambda y. y y) (\lambda z. z))$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} ((\lambda z. z) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} ((\lambda z. \boxed{z}) (\lambda z. z))((\lambda y. y y) (\lambda z. z))$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \text{ --}\beta\text{--}\>$$
$$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$$
$$\text{--}\beta\text{--}\> ((\lambda z. \boxed{z}) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$$
$$\text{--}\beta\text{--}\> \boxed{(\lambda z. z)} ((\lambda y. y y) (\lambda z. z))$$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Lazy evaluation:


$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} ((\lambda z. z) (\lambda z. z))((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} (\lambda z. \boxed{z}) \underline{((\lambda y. y y) (\lambda z. z))} \xrightarrow{\beta}$

$(\lambda y. y y) (\lambda z. z)$



Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} ((\lambda z. z) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\xrightarrow{\beta} (\lambda z. z) ((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta}$

$(\lambda y. y y) (\lambda z. z)$

Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$

- Lazy evaluation:

$(\lambda x. x x)((\lambda y. y y) (\lambda z. z)) \text{ --}\beta\text{--}\rightarrow$

$((\lambda y. y y) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\text{--}\beta\text{--}\rightarrow ((\lambda z. z) (\lambda z. z)) ((\lambda y. y y) (\lambda z. z))$

$\text{--}\beta\text{--}\rightarrow (\lambda z. z) ((\lambda y. y y) (\lambda z. z)) \text{ --}\beta\text{--}\rightarrow$

$(\lambda y. y y) (\lambda z. z) \sim\beta\sim \lambda z. z$

Example 2

- $(\lambda x. x x)((\lambda y. y y) (\lambda z. z))$
- Eager evaluation:

$(\lambda x. x x) ((\lambda y. y y) (\lambda z. z)) \xrightarrow{\beta} (\lambda x. x x) ((\lambda z. z) (\lambda z. z)) \xrightarrow{\beta} (\lambda x. x x) (\lambda z. z) \xrightarrow{\beta} (\lambda z. z) (\lambda z. z) \xrightarrow{\beta} \lambda z. z$



η (Eta) Reduction

- η Rule: $\lambda x. f x \xrightarrow{\eta} f$ if x not free in f
 - Can be useful in each direction
 - Not valid in Ocaml
 - recall lambda-lifting and side effects
 - Not equivalent to $(\lambda x. f) x \rightarrow f$ (inst of β)
- Example: $\lambda x. (\lambda y. y) x \xrightarrow{\eta} \lambda y. y$