CS 225

#35: Graph Fundamentals

Motivation:
Graphs are awesome data structures that allow us to represent an enormous range of problems. To study these problems, we need:

1. A common vocabulary to talk about graphs
2. Implementation(s) of a graph
3. Traversals on graphs
4. Algorithms on graphs

Graph Vocabulary
Consider a graph **G** with vertices **V** and edges **E**, **G=(V,E)**.

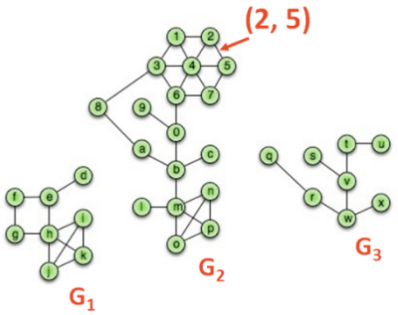

Incident Edges:
I(v) = { (x, v) in E }

Degree(v): **|I|**

Adjacent Vertices:
A(v) = { x : (x, v) in E }

Path(G_2): Sequence of vertices connected by edges

Cycle(G_1): Path with a common begin and end vertex.

Simple Graph(G): A graph with no self loops or multi-edges.

Subgraph(G): **G' = (V', E')**:
V' ∈ V, E' ∈ E, and (u, v) ∈ E → u ∈ V', v ∈ V'

Graphs that we will study this semester include:
Complete subgraph(G)
Connected subgraph(G)
Connected component(G)
Acyclic subgraph(G)
Spanning tree(G)

Size and Running Times
Running times are often reported by **n**, the number of vertices, but often depend on **m**, the number of edges.

For arbitrary graphs, the **minimum** number of edges given a graph that is:



Not Connected:

Minimally Connected:*

The **maximum** number of edges given a graph that is:

Simple:

Not Simple:

The relationship between the degree of the graph and the edges:

Graph Structure

Weights:

Direction:

Graph ADT

Data	Functions

1. Vertices
 	
2. Edges
 	
3. Some data structure maintaining the structure between vertices and edges.
	`insertVertex(K key);`
	`insertEdge(Vertex v1, Vertex v2, K key);`
	
	`removeVertex(Vertex v);`
	`removeEdge(Vertex v1, Vertex v2);`
	
	`incidentEdges(Vertex v);`
	`areAdjacent(Vertex v1, Vertex v2);`
	
	`origin(Edge e);`
	`destination(Edge e);`

Graph Implementation #1: Edge List

Vert.	Edges

u		a
v		b
w		c
z		d

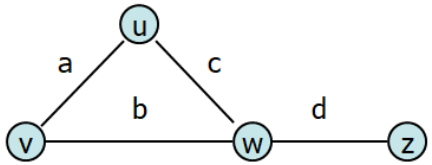

Operations:

insertVertex(K key):

removeVertex(Vertex v):

areAdjacent(Vertex v1, Vertex v2):

incidentEdges(Vertex v):