Programming Languages and Compilers (CS 421)

Elsa L Gunter

2112 SC, UIUC

http://courses.engr.illinois.edu/cs421

Based in part on slides by Mattox Beckman, as updated by Vikram Adve and Gul Agha



Using Ocamlyacc

- Input attribute grammar is put in file <*grammar*>.mly
- Execute

  ocamlyacc <*grammar*>.mly
- Produces code for parser in

  <*grammar*>.ml

  and interface (including type declaration for tokens) in

  <*grammar*>.mli



Parser Code

- <*grammar*>.ml defines one parsing function per entry point
- Parsing function takes a lexing function (lexer buffer to token) and a lexer buffer as arguments
- Returns semantic attribute of corresponding entry point



Ocamlyacc Input

- File format:

%{

    <*header*>

%}

    <*declarations*>

%%

    <*rules*>

%%

    <*trailer*>



Ocamlyacc <*header*>

- Contains arbitrary Ocaml code
- Typically used to give types and functions needed for the semantic actions of rules and to give specialized error recovery
- May be omitted
- <*footer*> similar. Possibly used to call parser



Ocamlyacc <declarations>

- %token *symbol … symbol*
- Declare given symbols as tokens
- %token <*type*> *symbol … symbol*
- Declare given symbols as token constructors, taking an argument of type <*type*>
- %start *symbol … symbol*
- Declare given symbols as entry points; functions of same names in <*grammar*>.ml



Ocamlyacc <*declarations*>

- %type <*type*> *symbol … symbol*

  Specify type of attributes for given symbols. Mandatory for start symbols
- %left *symbol … symbol*
- %right *symbol … symbol*
- %nonassoc *symbol … symbol*

  Associate precedence and associativity to given symbols. Same line,same precedence; earlier line, lower precedence (broadest scope)

Ocamlyacc <*rules*>

- *nonterminal* :
  symbol ... symbol { *semantic_action* }
  | ...
  | *symbol ... symbol* { *semantic_action* }
  ;
- Semantic actions are arbitrary Ocaml expressions
- Must be of same type as declared (or inferred) for *nonterminal*
- Access semantic attributes (values) of symbols by position: $1 for first symbol, $2 to second …



Ocamlyacc <*rules*>

- Rules without semantic actions form a context free grammar
- Without associativity and precedence declarations, Ocamlyacc can only accept ***unambiguous*** grammars.
- With such declaration, associativity and precedence must be only source of ambiguity
- Your main job: **Disambiguate** input grammar



Example

- Given grammar:

<exp> ::= <exp> * <exp> | <exp> / <exp>
| <exp> + <exp> | <exp> - <exp>
| <ident>| (<exp>)

- Disambiguate to:

<exp> ::= <term> | <term> + <exp> | <term> - <exp>
<term> ::= <factor>|<factor> * <term>|<factor> / <term>
<factor> ::= <id> | (<exp>)



Example - Base types

```
(* File: expr.ml *)
type expr =
    Term_as_Expr of term
  | Plus_Expr of (term * expr)
  | Minus_Expr of (term * expr)
and term =
    Factor_as_Term of factor
  | Mult_Term of (factor * term)
  | Div_Term of (factor * term)
and factor =
    Id_as_Factor of string
  | Parenthesized_Expr_as_Factor of expr
```

Example - Lexer (exprlex.mll)

```
{ (*open Exprparse*) }
let numeric = ['0' - '9']
let letter =['a' - 'z' 'A' - 'Z']
rule token = parse
   | "+" {Plus_token}
   | "-"  {Minus_token}
   | "*"  {Times_token}
   | "/"  {Divide_token}
   | "("  {Left_parenthesis}
   | ")"  {Right_parenthesis}
   | letter (letter|numeric|"_")* as id  {Id_token id}
   | [' ' '\t' '\n'] {token lexbuf}
   | eof {EOL}
```



Example - Parser (exprparse.mly)

```
%{ open Expr
%}
%token <string> Id_token
%token Left_parenthesis Right_parenthesis
%token Times_token Divide_token
%token Plus_token Minus_token
%token EOL
%start main
%type <expr> main
%%
```



Example - Parser (exprparse.mly)

```
(*<exp> ::= <term> | <term> + <exp>
            | <term> - <exp> *)
expr:
   term
       { Term_as_Expr $1 }
 | term Plus_token expr
       { Plus_Expr ($1, $3) }
 | term Minus_token expr
       { Minus_Expr ($1, $3) }
```



Example - Parser (exprparse.mly)

```
(*<term> ::= <factor>|<factor> * <term>|
   <factor> / <term> *)
term:
    factor
        { Factor_as_Term $1 }
  | factor Times_token term
        { Mult_Term ($1, $3) }
  | factor Divide_token term
        { Div_Term ($1, $3) }
```

Example - Parser (exprparse.mly)

```
(*<factor> ::= <id> | ( <exp> ) *)
factor:
   Id_token
       { Id_as_Factor $1 }
 | Left_parenthesis expr Right_parenthesis
       {Parenthesized_Expr_as_Factor $2 }
main:
 | expr EOL
       { $1 }
```



Example - Using Parser

```
# #use "expr.ml";;
...
# #use "exprparse.ml";;
...
# #use "exprlex.ml";;
...
# let test s =
  let lexbuf = Lexing.from_string (s^"\n") in
      main token lexbuf;;
```



Example - Using Parser

```
# test "a + b";;
- : expr =
Plus_Expr
 (Factor_as_Term (Id_as_Factor "a"),
  Term_as_Expr (Factor_as_Term
   (Id_as_Factor "b")))
```



LR Parsing

- Read tokens left to right (L)
- Create a rightmost derivation (R)
- How is this possible?
- Start at the bottom (left) and work your way up
- Last step has only one non-terminal to be replaced so is right-most
- Working backwards, replace mixed strings by non-terminals
- Always proceed so that there are no non-terminals to the right of the string to be replaced

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

= (● 0 + 1) + 0 shift

= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

=> (0 ● + 1) + 0 reduce
= (● 0 + 1) + 0 shift
= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>



<Sum> =>

= (<Sum> ● + 1) + 0	shift
=> (0 ● + 1) + 0	reduce
= (● 0 + 1) + 0	shift
= ● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>



<Sum> =>

=	(<Sum> + ● 1) + 0	shift
=	(<Sum> ● + 1) + 0	shift
=>	(0 ● + 1) + 0	reduce
=	(● 0 + 1) + 0	shift
=	● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

=> (<Sum> + 1 ●) + 0	reduce
= (<Sum> + ● 1) + 0	shift
= (<Sum> ● + 1) + 0	shift
=> (0 ● + 1) + 0	reduce
= (● 0 + 1) + 0	shift
= ● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

=> (<Sum> + <Sum> ●) + 0 reduce
=> (<Sum> + 1 ●) + 0 reduce
= (<Sum> + ● 1) + 0 shift
= (<Sum> ● + 1) + 0 shift
=> (0 ● + 1) + 0 reduce
= (● 0 + 1) + 0 shift
= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

= (<Sum> ●) + 0	shift
=> (<Sum> + <Sum> ●) + 0	reduce
=> (<Sum> + 1 ●) + 0	reduce
= (<Sum> + ● 1) + 0	shift
= (<Sum> ● + 1) + 0	shift
=> (0 ● + 1) + 0	reduce
= (● 0 + 1) + 0	shift
= ● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

=> (<Sum>) ● + 0 reduce
= (<Sum> ●) + 0 shift
=> (<Sum> + <Sum> ●) + 0 reduce
=> (<Sum> + 1 ●) + 0 reduce
= (<Sum> + ● 1) + 0 shift
= (<Sum> ● + 1) + 0 shift
=> (0 ● + 1) + 0 reduce
= (● 0 + 1) + 0 shift
= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

= <Sum> ● + 0	shift
=> (<Sum>) ● + 0	reduce
= (<Sum> ●) + 0	shift
=> (<Sum> + <Sum> ●) + 0	reduce
=> (<Sum> + 1 ●) + 0	reduce
= (<Sum> + ● 1) + 0	shift
= (<Sum> ● + 1) + 0	shift
=> (0 ● + 1) + 0	reduce
= (● 0 + 1) + 0	shift
= ● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

= <Sum> + ● 0	shift
= <Sum> ● + 0	shift
=> (<Sum>) ● + 0	reduce
= (<Sum> ●) + 0	shift
=> (<Sum> + <Sum> ●) + 0	reduce
=> (<Sum> + 1 ●) + 0	reduce
= (<Sum> + ● 1) + 0	shift
= (<Sum> ● + 1) + 0	shift
=> (0 ● + 1) + 0	reduce
= (● 0 + 1) + 0	shift
= ● (0 + 1) + 0	shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> =>

=> <Sum> + 0 ● reduce

= <Sum> + ● 0 shift

= <Sum> ● + 0 shift

=> (<Sum>) ● + 0 reduce

= (<Sum> ●) + 0 shift

=> (<Sum> + <Sum> ●) + 0 reduce

=> (<Sum> + 1 ●) + 0 reduce

= (<Sum> + ● 1) + 0 shift

= (<Sum> ● + 1) + 0 shift

=> (0 ● + 1) + 0 reduce

= (● 0 + 1) + 0 shift

= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> => <Sum> + <Sum > ● reduce
=> <Sum> + 0 ● reduce
= <Sum> + ● 0 shift
= <Sum> ● + 0 shift
=> (<Sum>) ● + 0 reduce
= (<Sum> ●) + 0 shift
=> (<Sum> + <Sum> ●) + 0 reduce
=> (<Sum> + 1 ●) + 0 reduce
= (<Sum> + ● 1) + 0 shift
= (<Sum> ● + 1) + 0 shift
=> (0 ● + 1) + 0 reduce
= (● 0 + 1) + 0 shift
= ● (0 + 1) + 0 shift

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

<Sum> ● => <Sum> + <Sum > ● reduce
=> <Sum> + 0 ● reduce
= <Sum> + ● 0 shift
= <Sum> ● + 0 shift
=> (<Sum>) ● + 0 reduce
= (<Sum> ●) + 0 shift
=> (<Sum> + <Sum> ●) + 0 reduce
=> (<Sum> + 1 ●) + 0 reduce
= (<Sum> + ● 1) + 0 shift
= (<Sum> ● + 1) + 0 shift
=> (0 ● + 1) + 0 reduce
= (● 0 + 1) + 0 shift
= ● (0 + 1) + 0 shift

Example

(0 + 1) + 0

Example

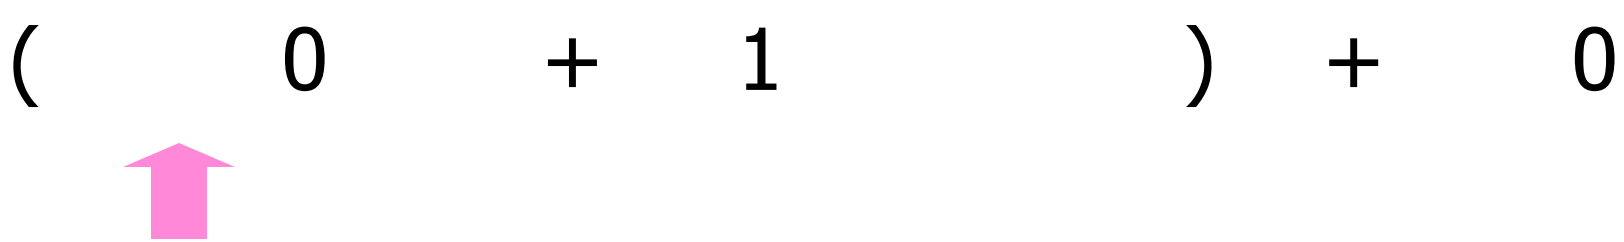

Example

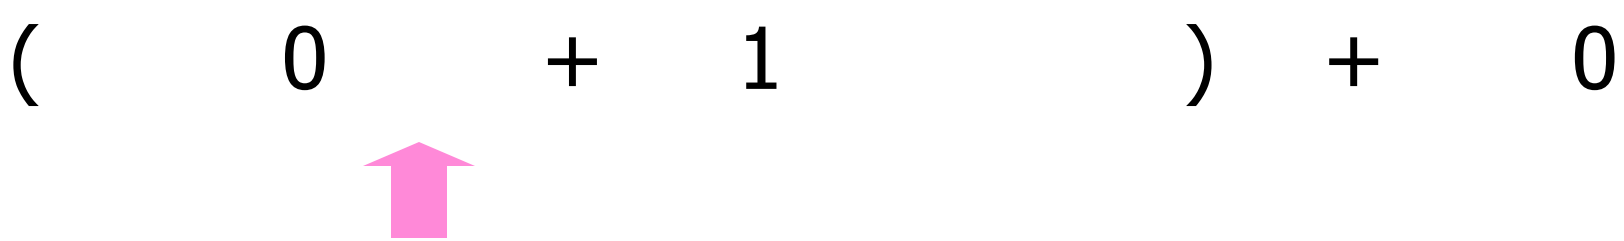

Example

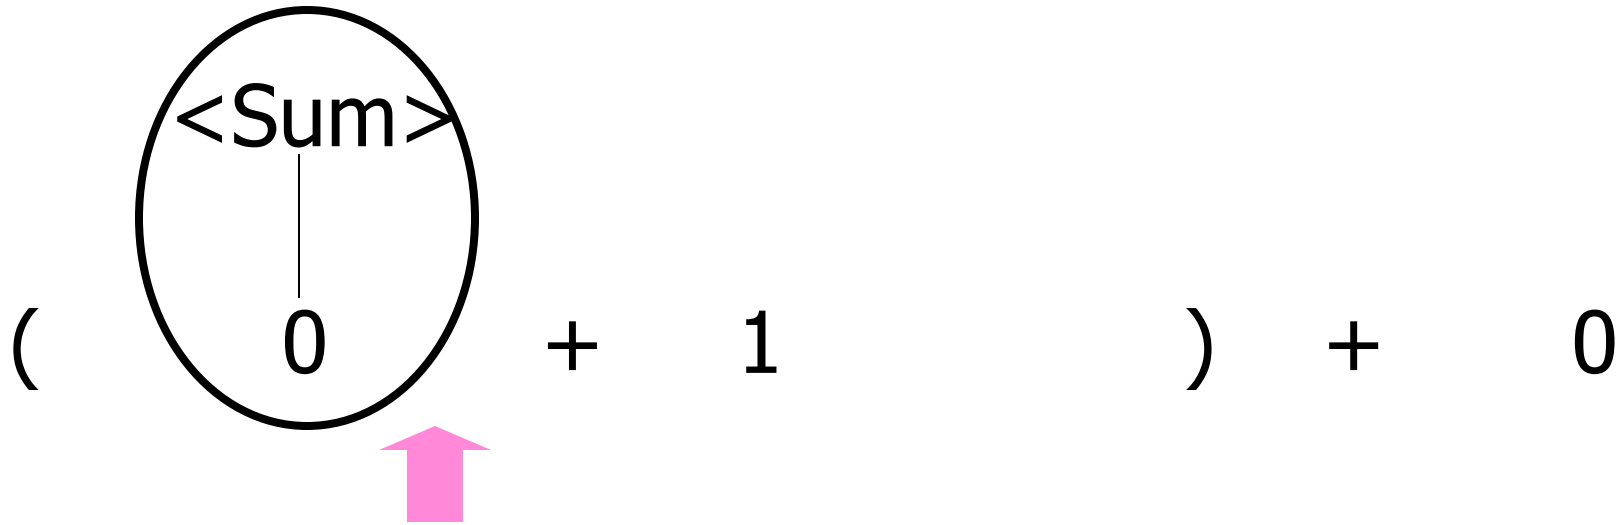

Example

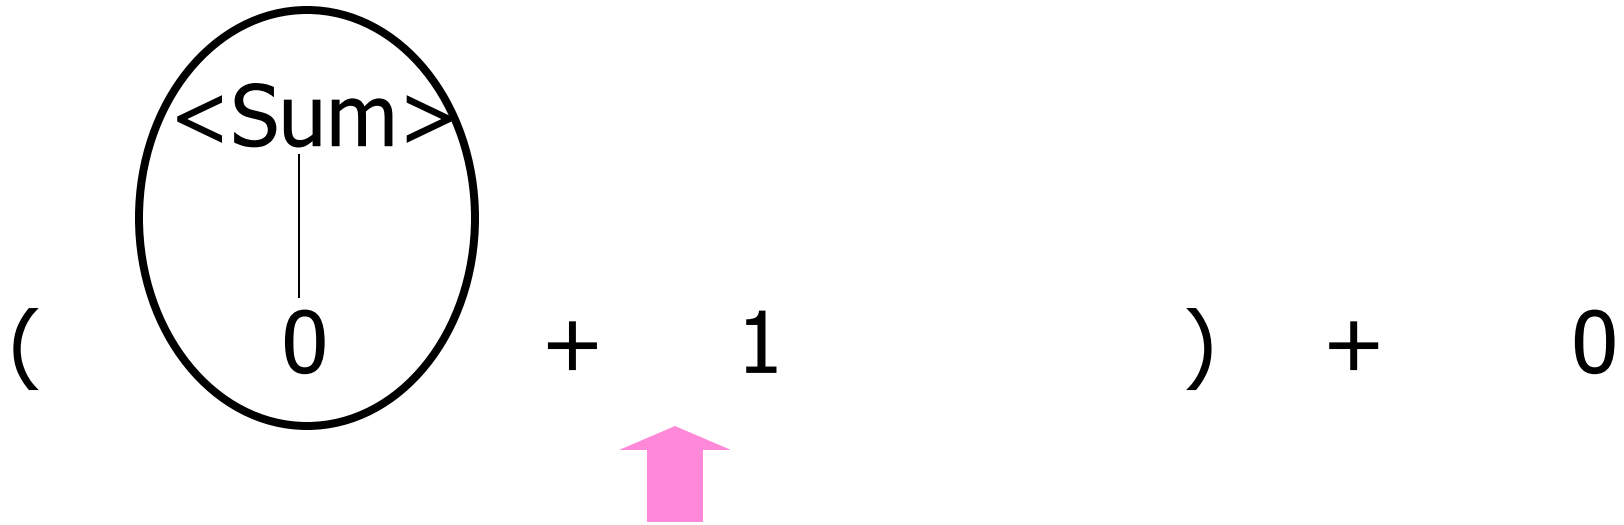

Example

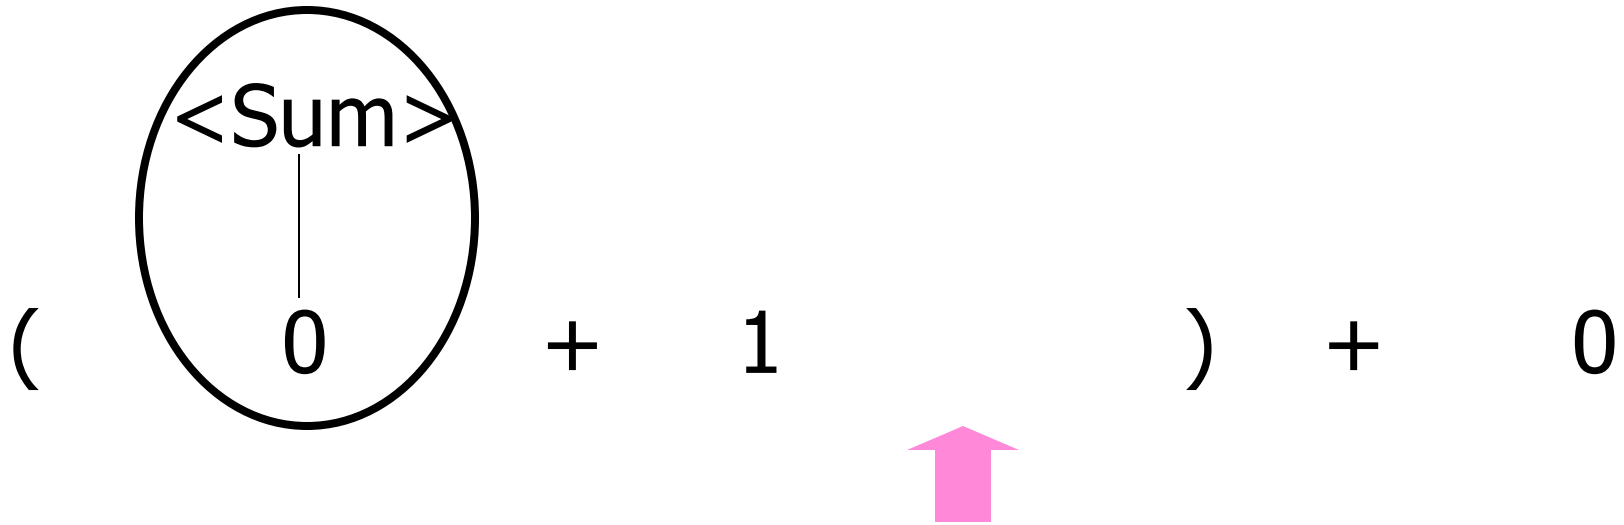

Example

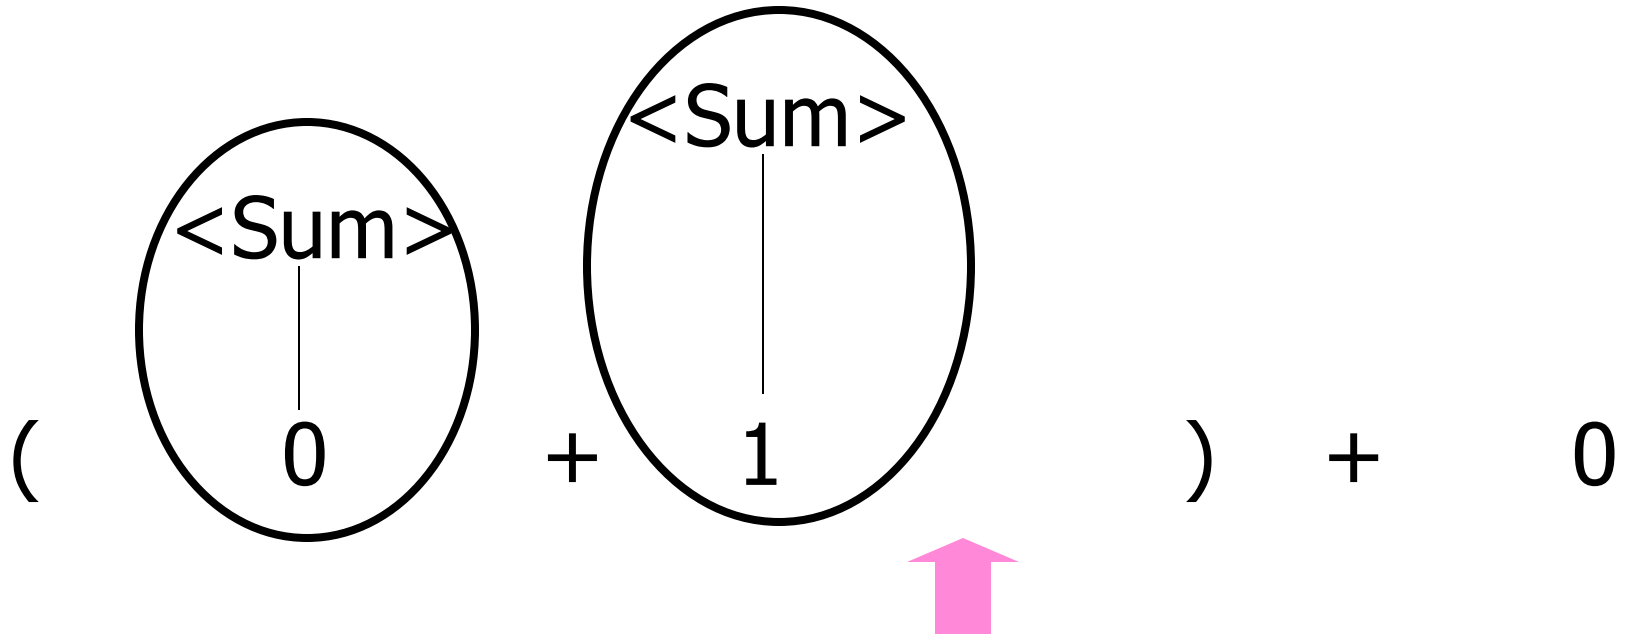

Example

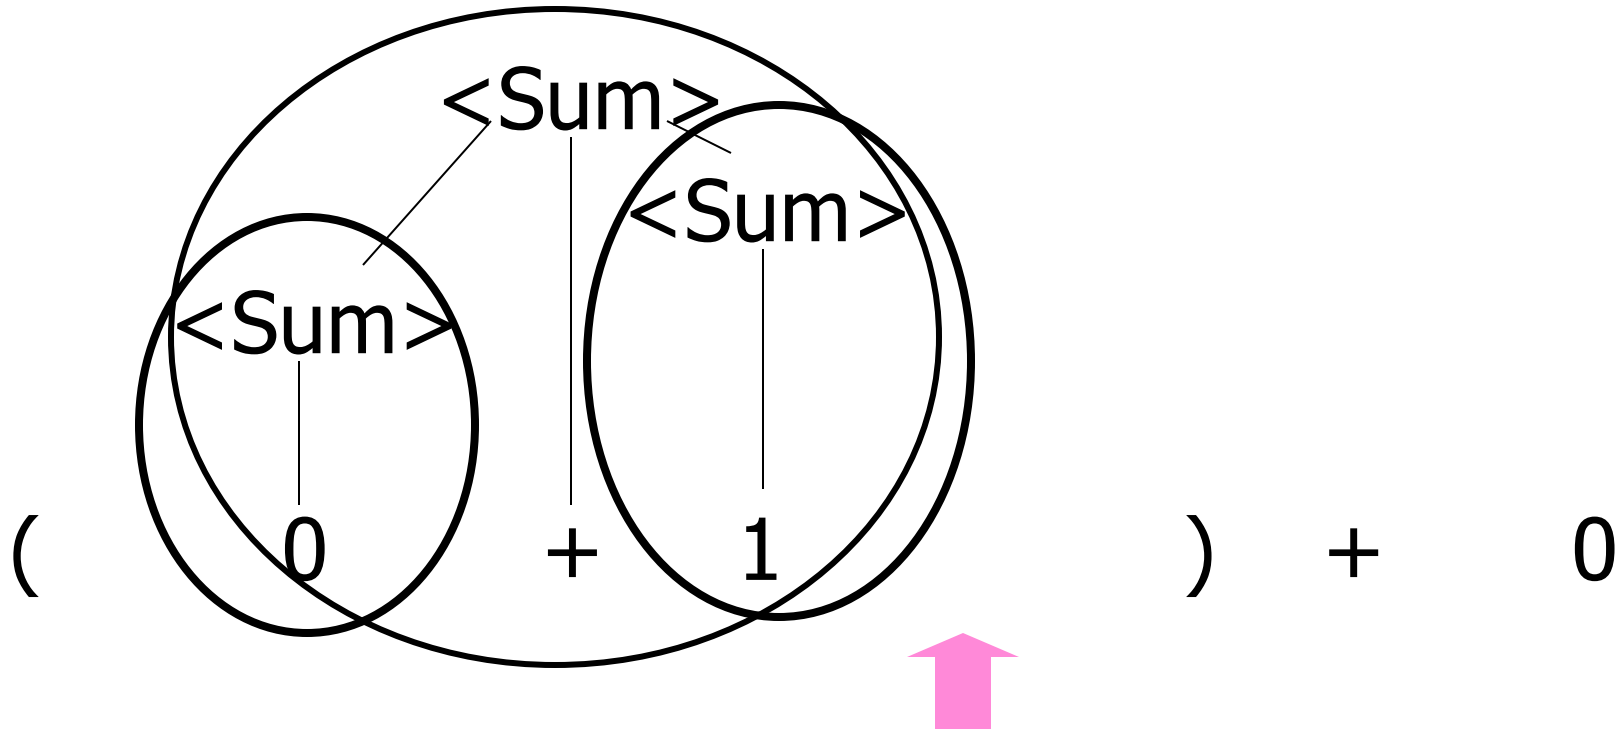

Example

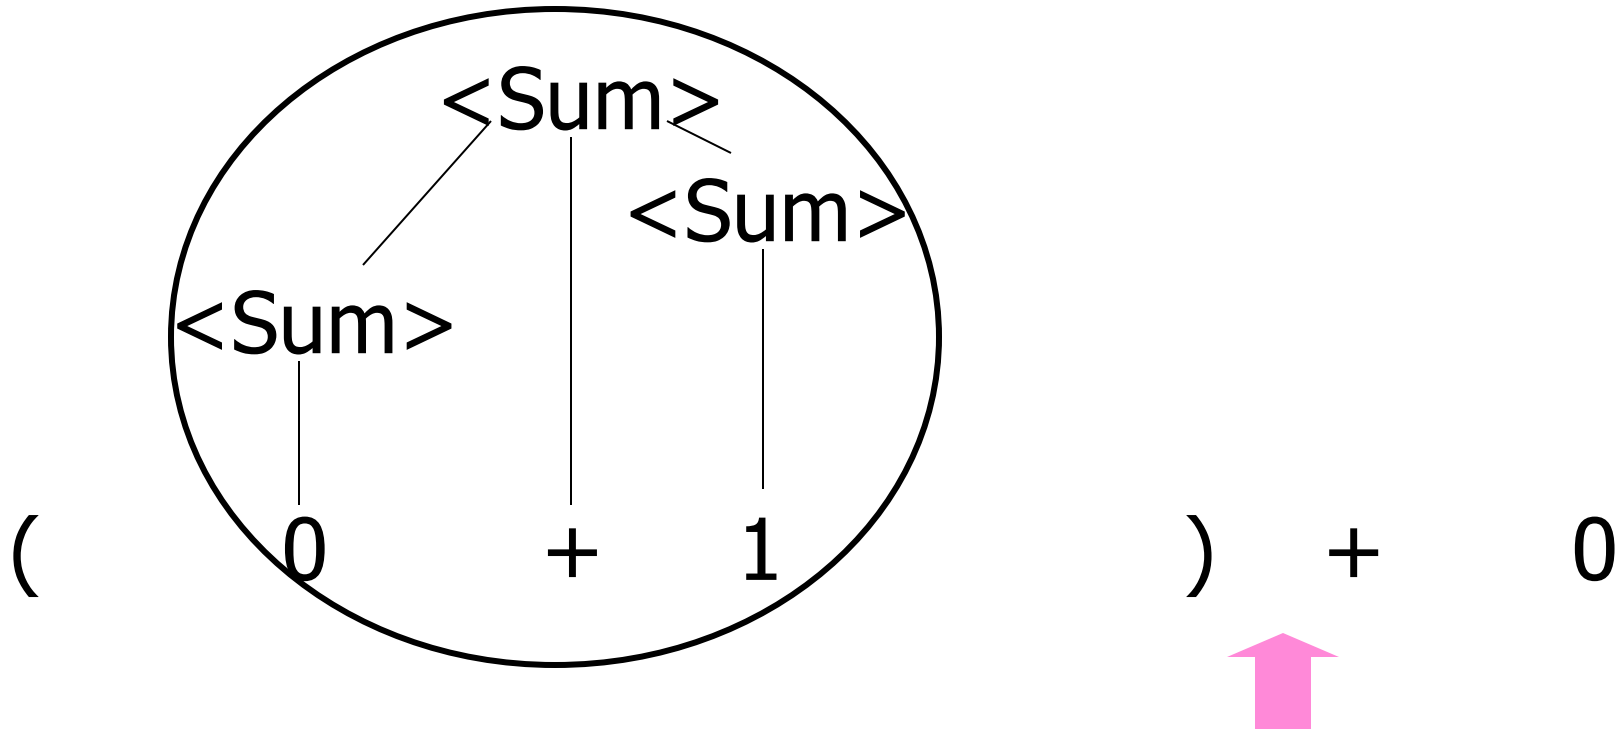

Example

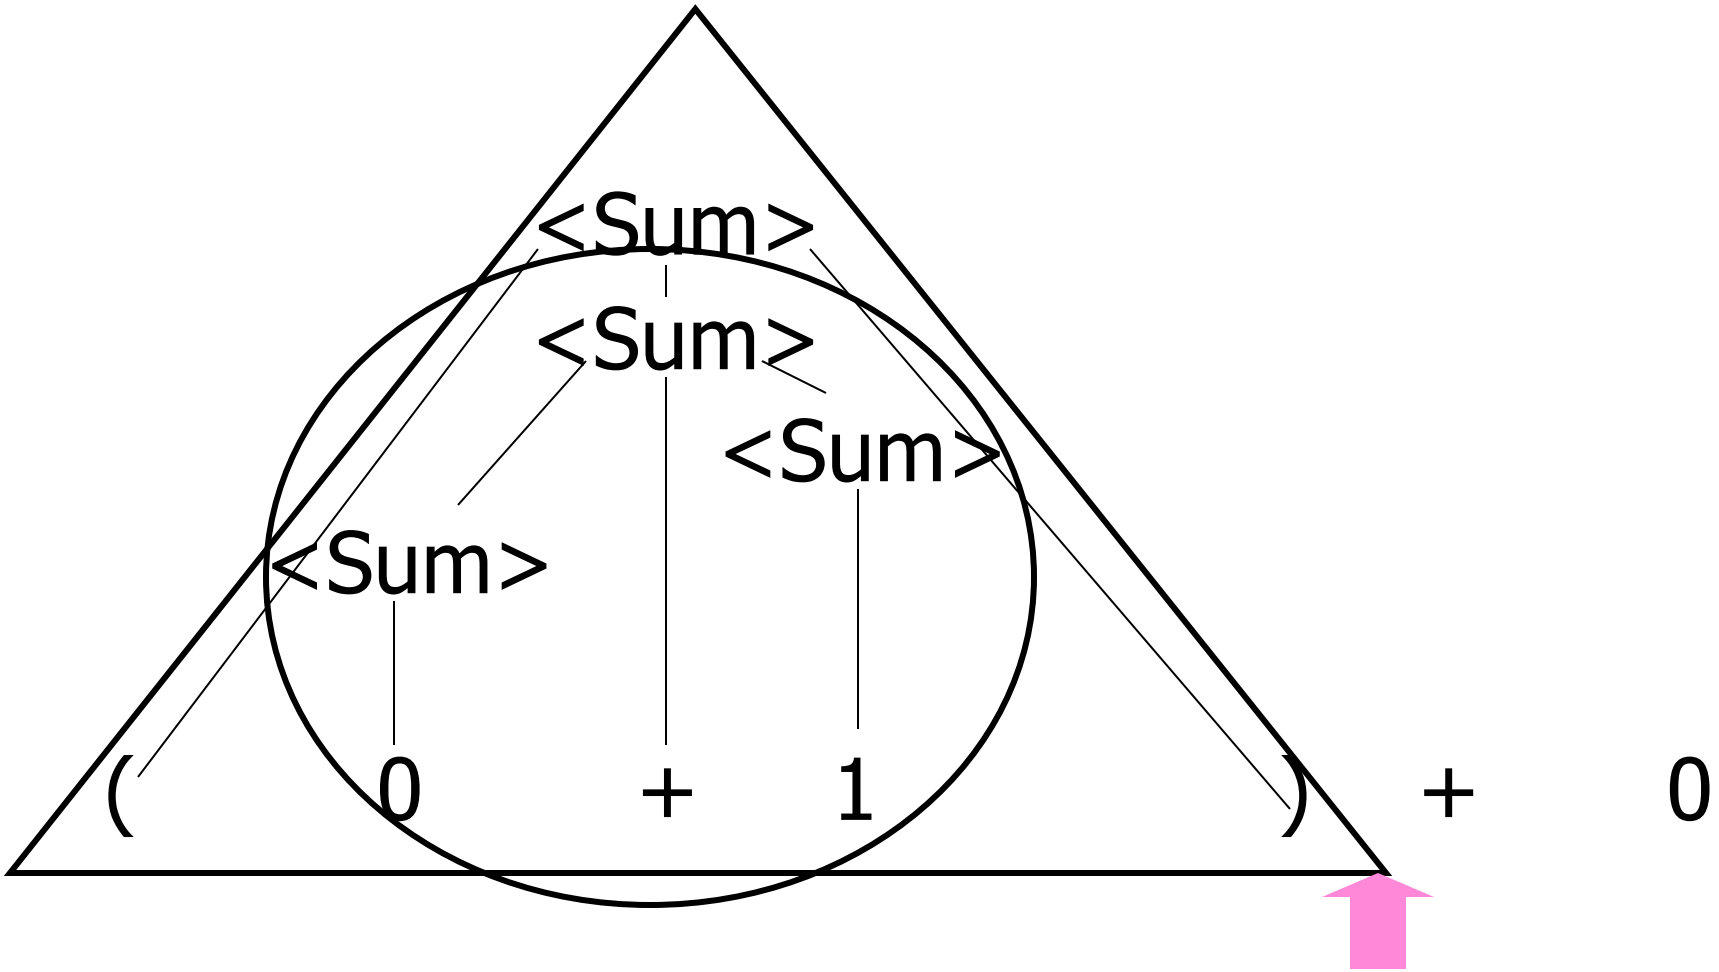

Example

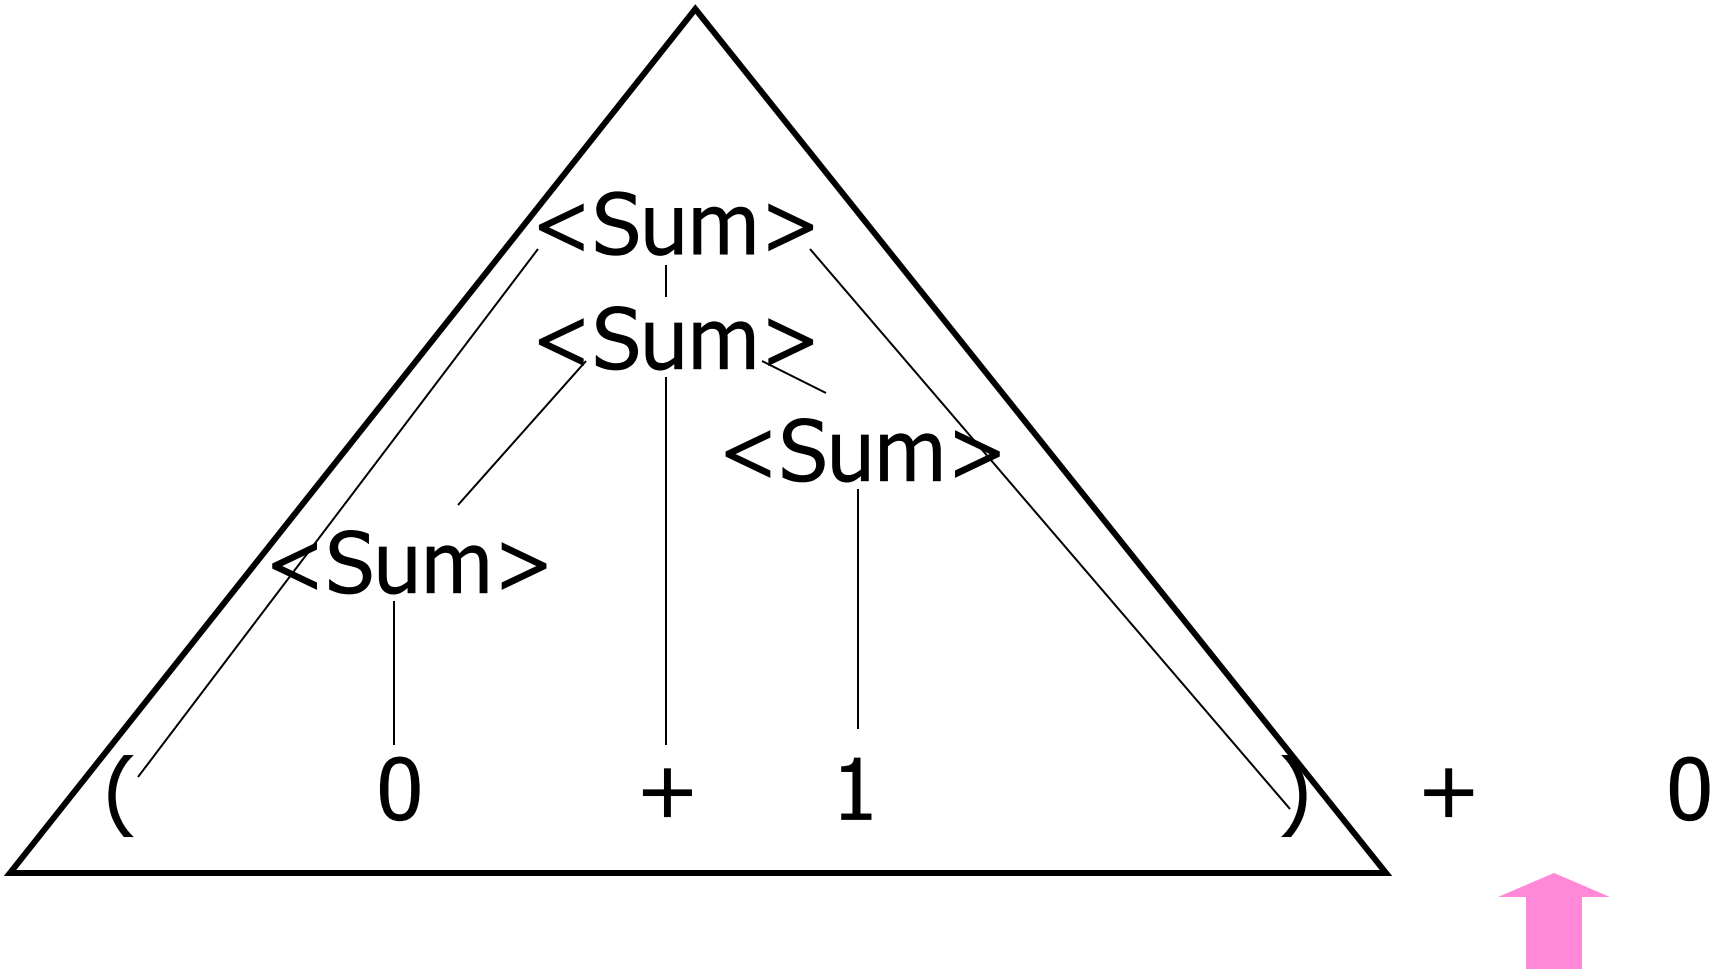

Example

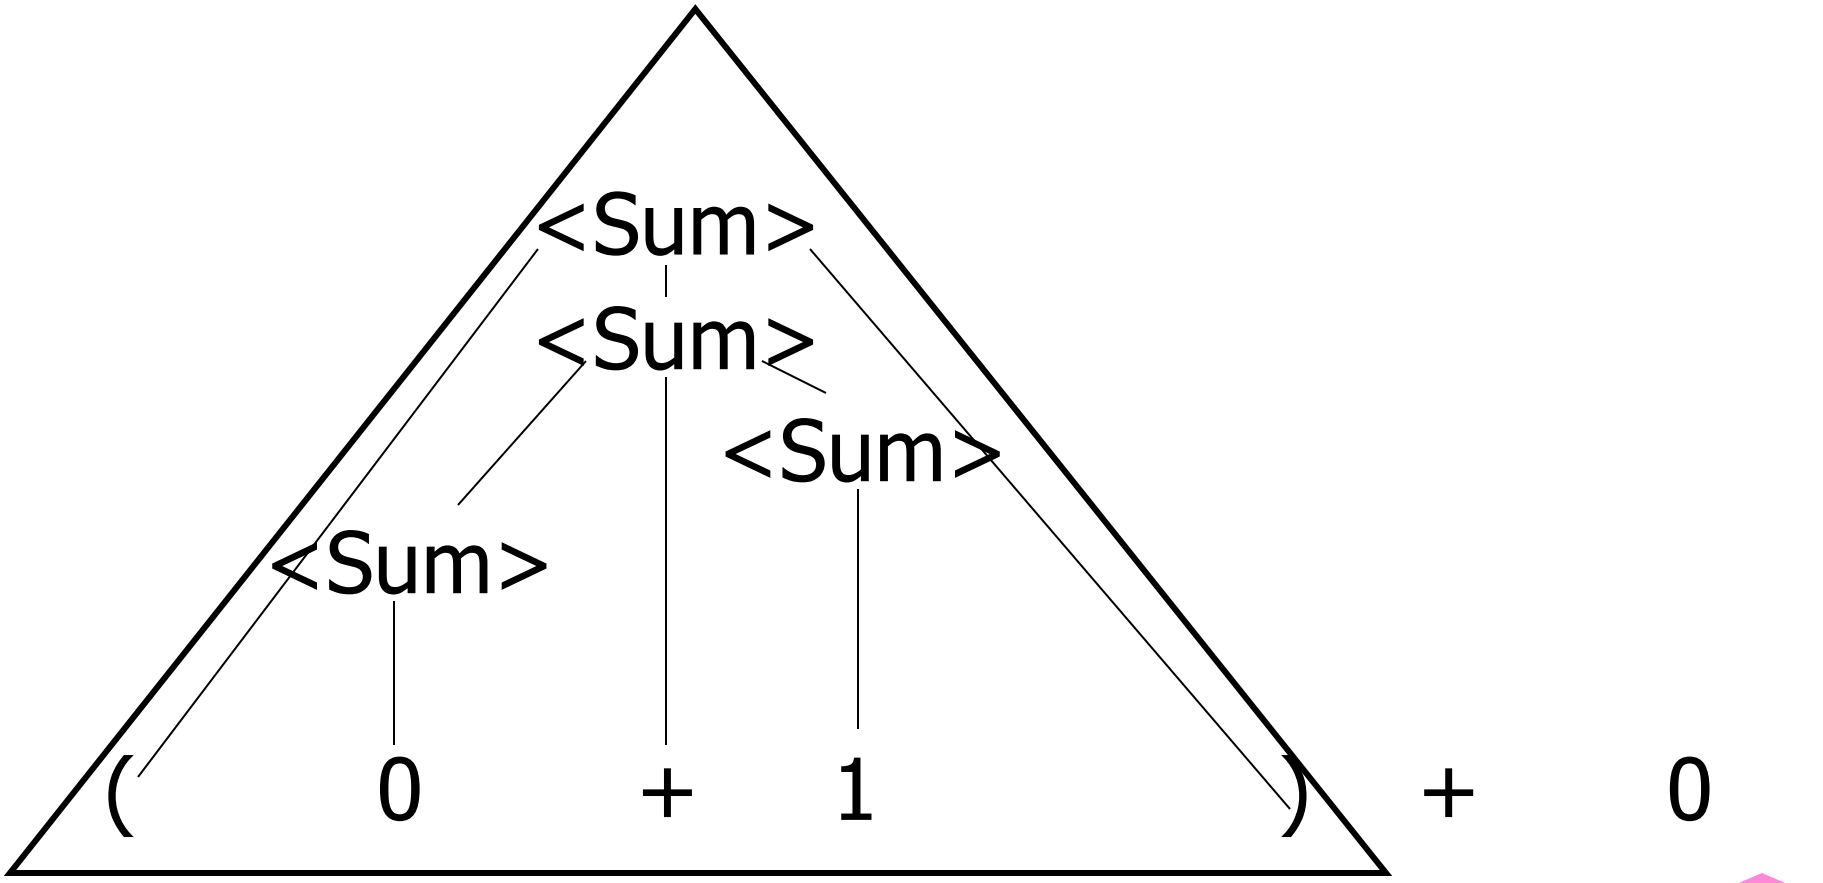

Example

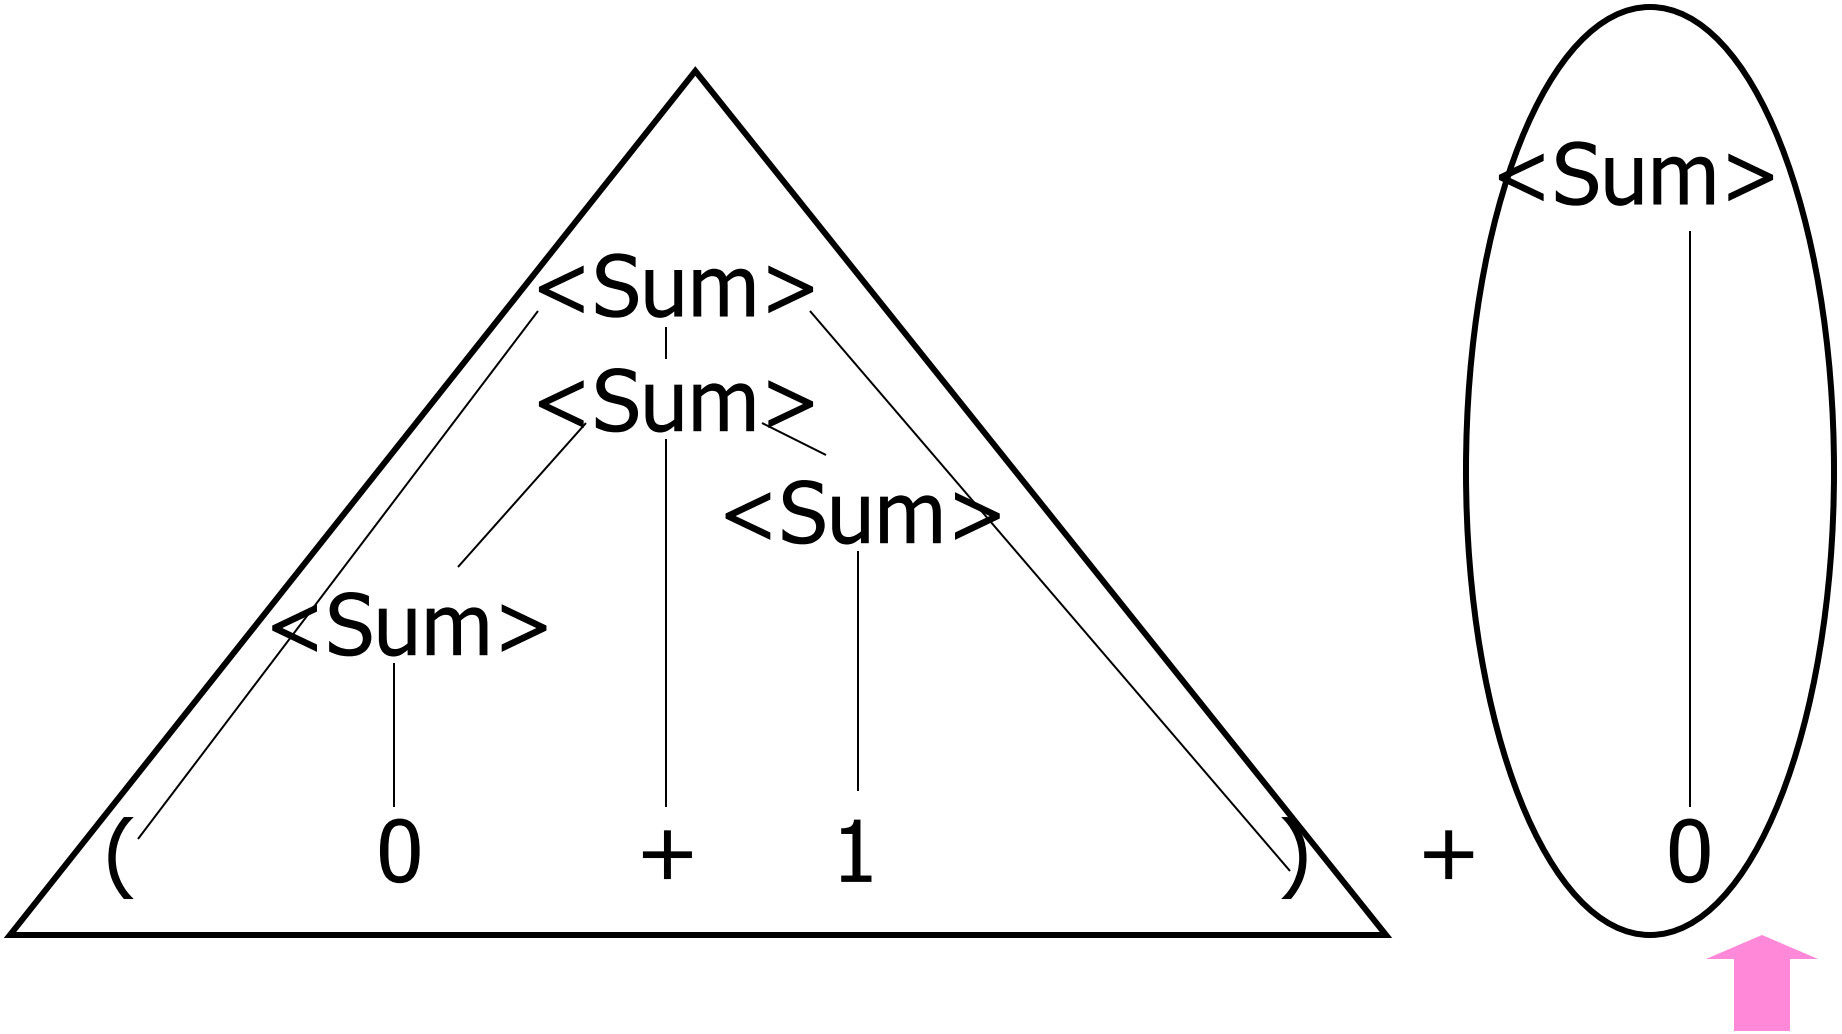

Example

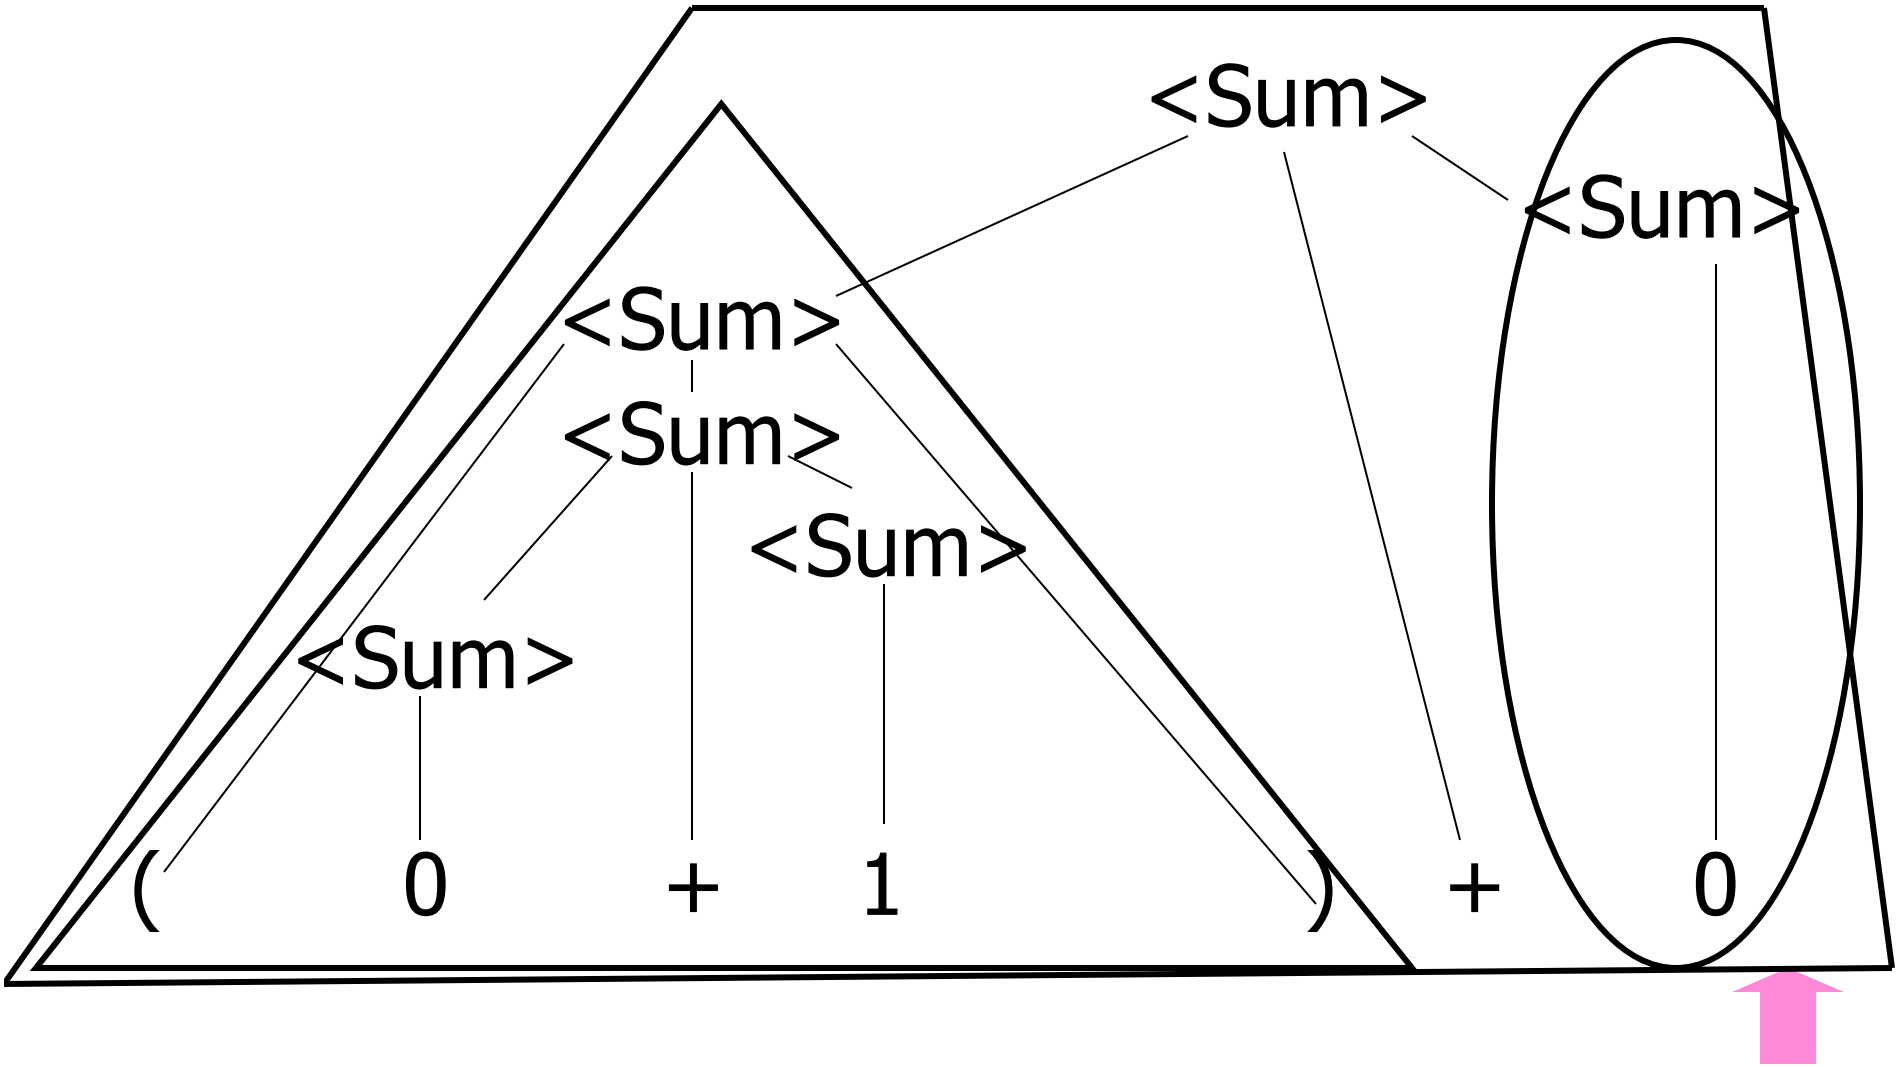

Example

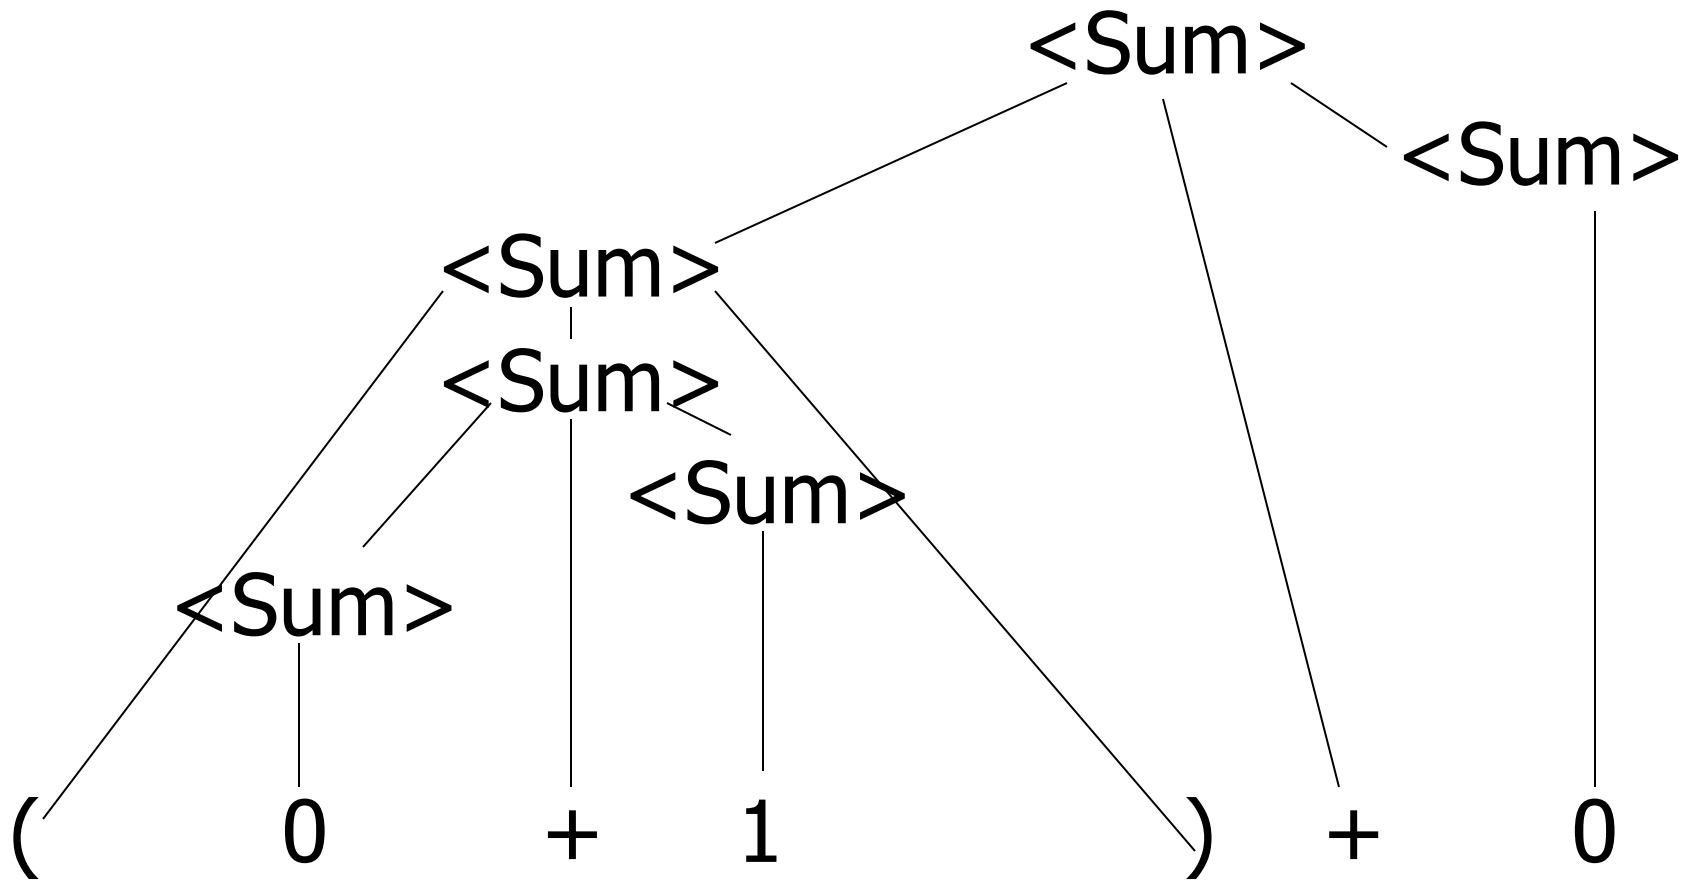



LR Parsing Tables

- Build a pair of tables, Action and Goto, from the grammar
  - This is the hardest part, we omit here
  - Rows labeled by states
  - For Action, columns labeled by terminals and “end-of-tokens” marker
    - (more generally strings of terminals of fixed length)
  - For Goto, columns labeled by non-terminals



Action and Goto Tables

- Given a state and the next input, Action table says either
  - **shift** and go to state *n*, or
  - **reduce** by production *k* (explained in a bit)
  - **accept** or **error**
- Given a state and a non-terminal, Goto table says
  - go to state *m*



LR(i) Parsing Algorithm

- Based on push-down automata
- Uses states and transitions (as recorded in Action and Goto tables)
- Uses a stack containing states, terminals and non-terminals



LR(i) Parsing Algorithm

0. Insure token stream ends in special "end-of-tokens" symbol
1. Start in state 1 with an empty stack
2. Push **state**(1) onto stack
3. Look at next *i* tokens from token stream (*toks*) (don't remove yet)
4. If top symbol on stack is **state**(*n*), look up action in Action table at (*n*, *toks*)



LR(i) Parsing Algorithm

5. If action = **shift** *m*,
   a) Remove the top token from token stream and push it onto the stack
   b) Push **state**(*m*) onto stack
   c) Go to step 3



LR(i) Parsing Algorithm

6. If action = **reduce** *k* where production *k* is E ::= u
   a) Remove 2 * length(u) symbols from stack (u and all the interleaved states)
   b) If new top symbol on stack is **state**(*m*), look up new state *p* in Goto(*m*,E)
   c) Push E onto the stack, then push **state**(*p*) onto the stack
   d) Go to step 3



LR(i) Parsing Algorithm

7. If action = **accept**
   - Stop parsing, return success
8. If action = **error**,
   - Stop parsing, return failure



Adding Synthesized Attributes

- Add to each **reduce** a rule for calculating the new synthesized attribute from the component attributes
- Add to each non-terminal pushed onto the stack, the attribute calculated for it
- When performing a **reduce**,
  - gather the recorded attributes from each non-terminal popped from stack
  - Compute new attribute for non-terminal pushed onto stack



Shift-Reduce Conflicts

- **Problem**: can't decide whether the action for a state and input character should be **shift** or **reduce**
- Caused by ambiguity in grammar
- Usually caused by lack of associativity or precedence information in grammar

Example: <Sum> = 0 | 1 | (<Sum>) | <Sum> + <Sum>

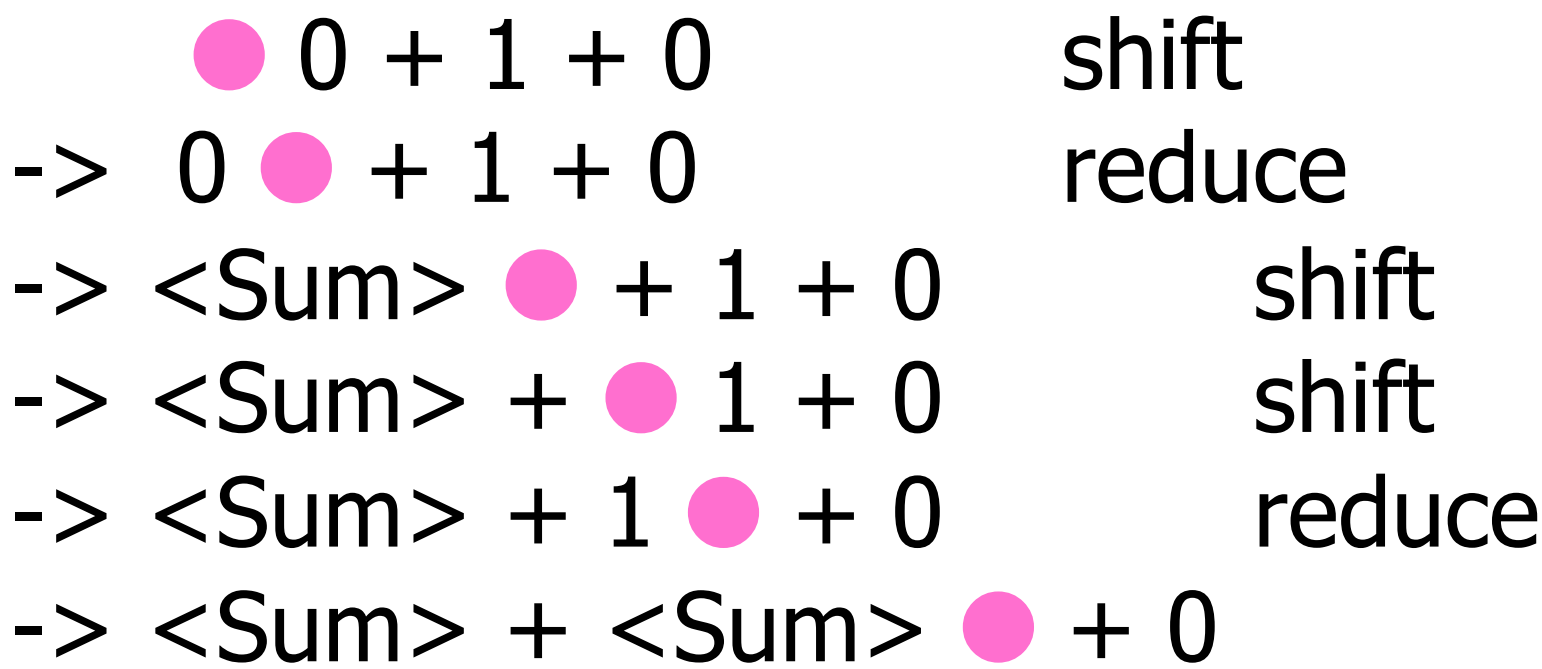



Example - cont

- **Problem:** shift or reduce?

- You can shift-shift-reduce-reduce or reduce-shift-shift-reduce

- Shift first - right associative
- Reduce first- left associative



Reduce - Reduce Conflicts

- **Problem:** can't decide between two different rules to reduce by
- Again caused by ambiguity in grammar
- **Symptom:** RHS of one production suffix of another
- Requires examining grammar and rewriting it
- Harder to solve than shift-reduce errors



Example

- S ::= A | aB A ::= abc B ::= bc

  - ● abc shift
  - a ● bc shift
  - ab ● c shift
  - abc ●

- Problem: reduce by B ::= bc then by S ::= aB, or by A::= abc then S::A?