

Facilitated Instrument Learning Design Document

Jiajun Xu, Theodore Lao, Chris Chen

02/18/2018

1 Introduction

1.1 Objective

Problem Statement

Musicians spend a substantial amount of time learning the positions of chords and notes on new instruments they are interested in learning. Facilitated instrument learning will allow one to sing, hum, or play another instrument and the currently played notes will be mapped onto the new instrument in real time. This allows a beginner, with little musical background, to sing a melody they wish to play and learn it on a new instrument and also allows a professional, with an extensive background on musical theory and other instruments, to compose music on new instruments.

Proposed Solution

The proposed solution is for the acoustic input recorded into an analog MEMS microphone and the signal will go through an ADC. This will connect to a DSP chip which handles the frequency analysis. This will connect to a microprocessor which controls the LEDs on piano keys. The DSP chip filters noise, additional signals from the instrument, and harmonics to determine the current notes being played. The frequencies of the notes will correspond to positions on an instrument which can be indicated by LEDs.

1.2 Background

The software complexity will be within the pitch detection algorithm. Noise, additional harmonics, and overtones first come to mind when filtering. Then there are frequencies which come from striking strings and frequencies which come from resonances in instrument bodies. The pitch

detection algorithm will contain signal processing and machine learning algorithms such as autocorrelation and k clustering to accurately determine the fundamentals.

The hardware complexity of this project will be the system integration of the power, microphone, controls, and microprocessor.

There are other products in the market which help people learn instruments but they have different limitations which this project overcomes.

SCI V9000 KEY/NOTE VISUALIZER. This \$2000 product is limited because notes must be pre-selected on the piano for students to learn from later. With the proposed project, users produce the melodies with their voice or an instrument and the notes on the destination instrument will be shown in real time.

Synthesia This piano learning subscription service is limited to select songs the company has pre-transcribed for its users, so customers are unable to write songs with melodies they have come up with.

1.3 High-level Requirements List

- Detect pitches accurately at least 80 percent of the time,
- Analyze up to three notes simultaneously when a chord is played.
- Record at least two instruments, voice and guitar, and accurately map the notes to the piano.

2 Design

2.1 Block Diagram

Successful operation of this system relies on three units: a power supply unit, control unit, and audio unit. The audio unit listens to the acoustic sounds the signal is amplified into the ADC of the control unit. The signal processing unit contains the algorithms to determine the fundamentals of the acoustic signal. All modules in this unit are supplied by 3.3V and 5.0 V which are output by the voltage regulator in the power unit. The power unit contains a USB/USB-C connection for wide charging accessibility.

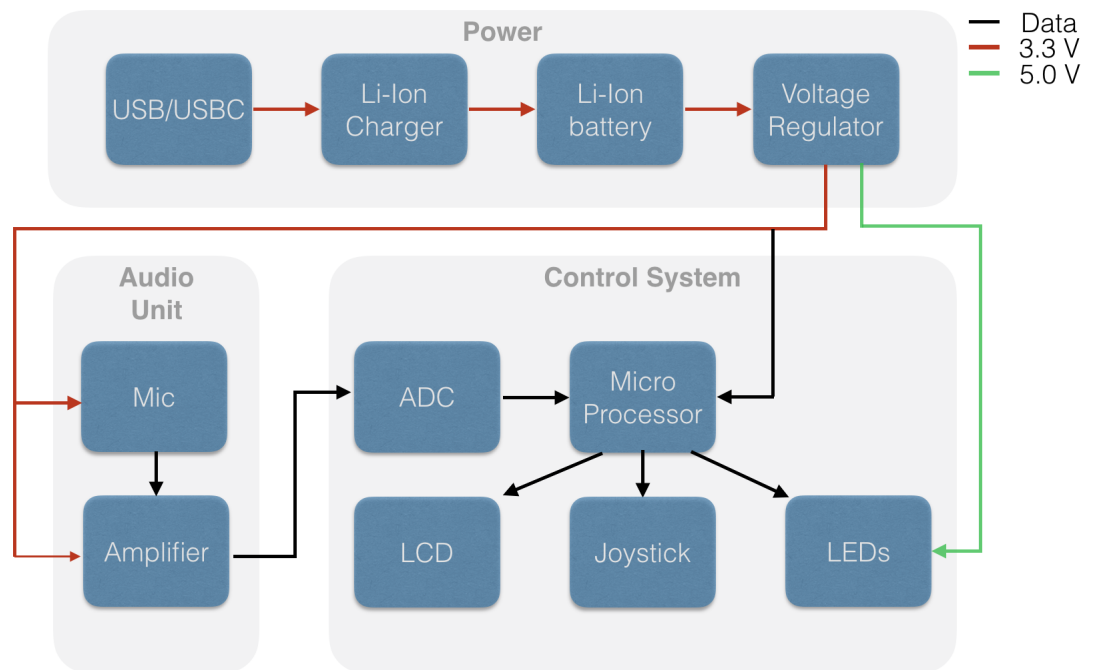


Figure 1: Project Block Diagram

2.2 Power Supply Unit

The Power module connects two 3.7V 18650 li-ion batteries to voltage regulators and a charging circuit. The voltage regulators step down to two 5V rails, each separately running a 5V to 3.3V LDO. These will supply power to other components in our system. The batteries will be charged via USB to ensure wide compatibility with current chargers.

Our design incorporates TI's BQ24103 battery charging IC which allows for detection of high current charging sources. The system is designed around a nominal voltage of 7.4V, implementing the use of two configured buck converters to step down to 5V for the LED drivers and a separate 5V rail for the micro-controller and amplifier chips. The same USB port used for charging has data connections for directly interfacing with the MCU.

Requirements	Verification
USB Input $V_{in} = 5.0 \pm 0.5V$	<ul style="list-style-type: none">• collect an array of 5v USB charging sources• measure voltage across VBUS before and after connection to battery charging circuit
Li-Ion Charging IC $V_{out} = 5.0 \pm 0.5V$	<ul style="list-style-type: none">• deplete battery and attach a power source to the IC and battery pack• record battery charging current and voltage until fully charged• verify circuit follows CC/CV charging scheme
Li-Ion Battery $V_{out} = 3.7 \pm 0.6V$	<ul style="list-style-type: none">• measure battery voltages at full and empty, and verify it falls within battery constraints
DC/DC conversion $V_{out1} = 3.3 \pm 0.3V$ $V_{out2} = 5 \pm 0.3V$	<ul style="list-style-type: none">• measure open voltage and verify correct voltages• simulate resistive load, and verify output voltages

2.2.1 Power Unit Schematic

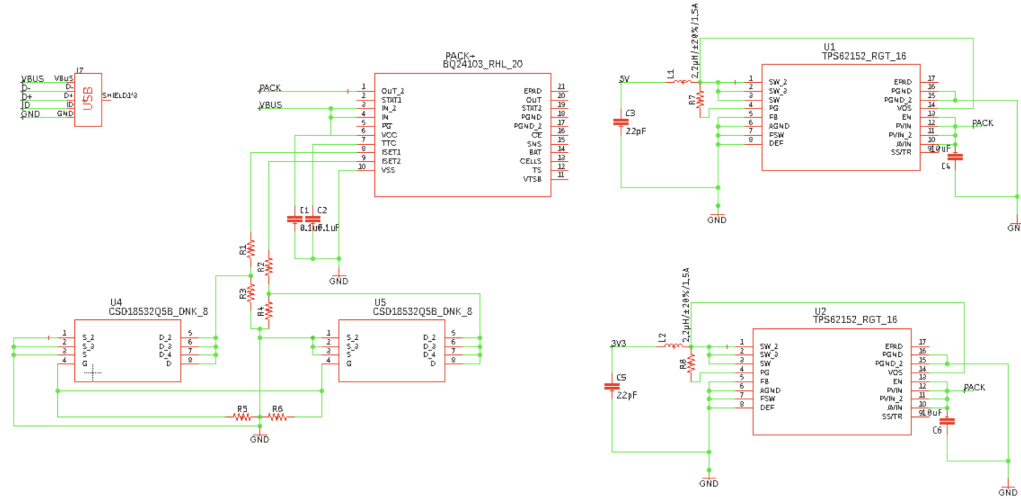


Figure 2: Audio Unit Schematic

2.3 Audio Unit

The audio unit contains an electret condenser microphone and an amplifier. The microphone outputs voltage variations due to acoustic vibrations. These voltage variations are then amplified through the MAX9814 amplifier with automatic gain control. The automatic gain control controls the amplified signal so it does not surpass the max voltage output of the amplifier. This ensures the signal sent to the control/signal processing system does not surpass the 2^12 maximum value for the microcontroller.

Table 1: My caption

Requirements	Verification
MEMS Mic Output voltage is between 2.45V and 3V	Feed the mic a sound and measure the output voltage of the mic
Amplifier Output voltage is between 3V and 3.3V	Attach the amplifier to the MEMS Mic, and monitor the output voltage of the amplifier

2.3.1 Audio Unit Schematic

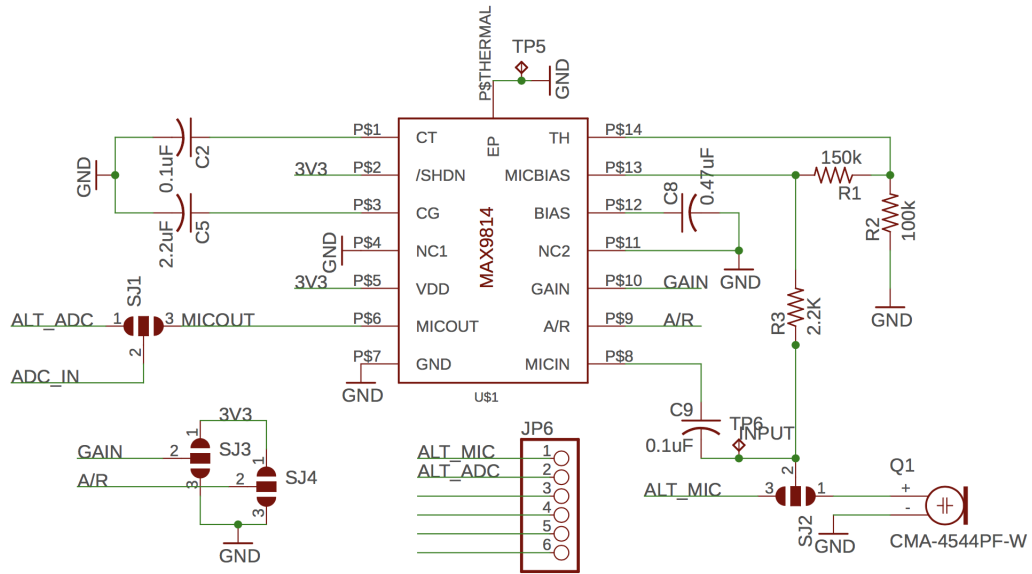


Figure 3: Audio Unit Schematic

2.4 Signal Processing Unit

The Signal Processing module takes the analog signal as an input, and outputs the frequencies of the signal by taking the fourier transform of the analog input data. It contains the microprocessor and LEDs. The microprocessor will perform algorithm work on the frequency domain data. After determining the fundamental frequencies of the audio, the corresponding LEDs on the piano keys will turn on.

Requirements	Verification
<p style="text-align: center;">ADC</p> <p>Discretize analog signal from 0-5 V to 2^{16} values</p>	<ul style="list-style-type: none"> • Connect pin pc10 of microcontroller to a DC power supply • Monitor output readings from ADC by supplying 0.0 V from the DC supply <ul style="list-style-type: none"> • Repeat previous step for 1.0 V, 2.0V, 3.0 V, and 4.0 V • Values for each voltage value should be separated 13000 - 14000 digital units apart.
<p style="text-align: center;">MicroProcessor</p> <p>Perform FFT on digital data from ADC</p> <p style="text-align: center;">Determine single fundamental in monophonic digital data</p> <p style="text-align: center;">Determine fundamentals of polyphonic sound at 65 Hz, 164 Hz and 196 Hz</p>	<ul style="list-style-type: none"> • Connect a waveform generator's output to microcontroller's digital input <ul style="list-style-type: none"> • Generate 50 Hz sine wave • FFT results should indicate peaks at $n*50\text{Hz}$ where $n = 1,2,3\dots$ <ul style="list-style-type: none"> • Play an A4 on the guitar and the algorithm should find the fundamental at $440 \text{ Hz} \pm 10 \text{ Hz}$ • Repeat for different notes B4, C4, D4.. <ul style="list-style-type: none"> • Play an open C chord on the guitar • Algorithm should find fundamentals at $65 \pm 10 \text{ Hz}$, $164 \pm 10 \text{ Hz}$, and $196 \pm 10 \text{ Hz}$) • Repeat for different chords and vocal recordings
<p style="text-align: center;">LEDs</p> <p>Microcontroller programmable</p>	<ul style="list-style-type: none"> • Supply 5.0V to the LED's Vcc with 0.1 microFarad bypass capacitor • Program microcontroller to address the first LED to dataIn of the LED chain <ul style="list-style-type: none"> • First LED should turn on • Repeat for other LEDs on the chain

2.4.1 Signal Processing Unit Schematic

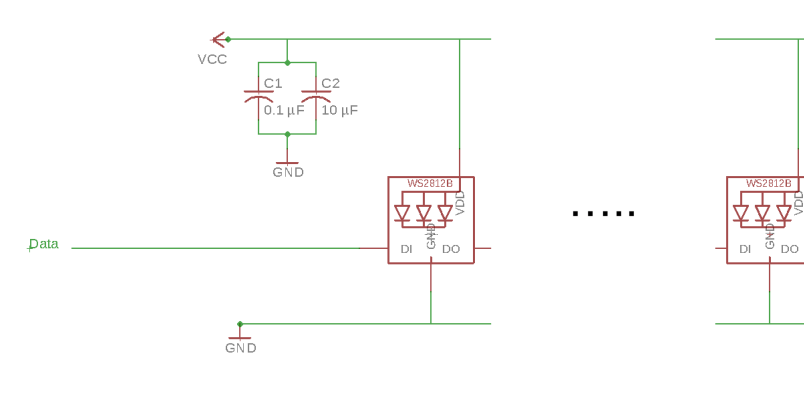


Figure 4: LED Schematic

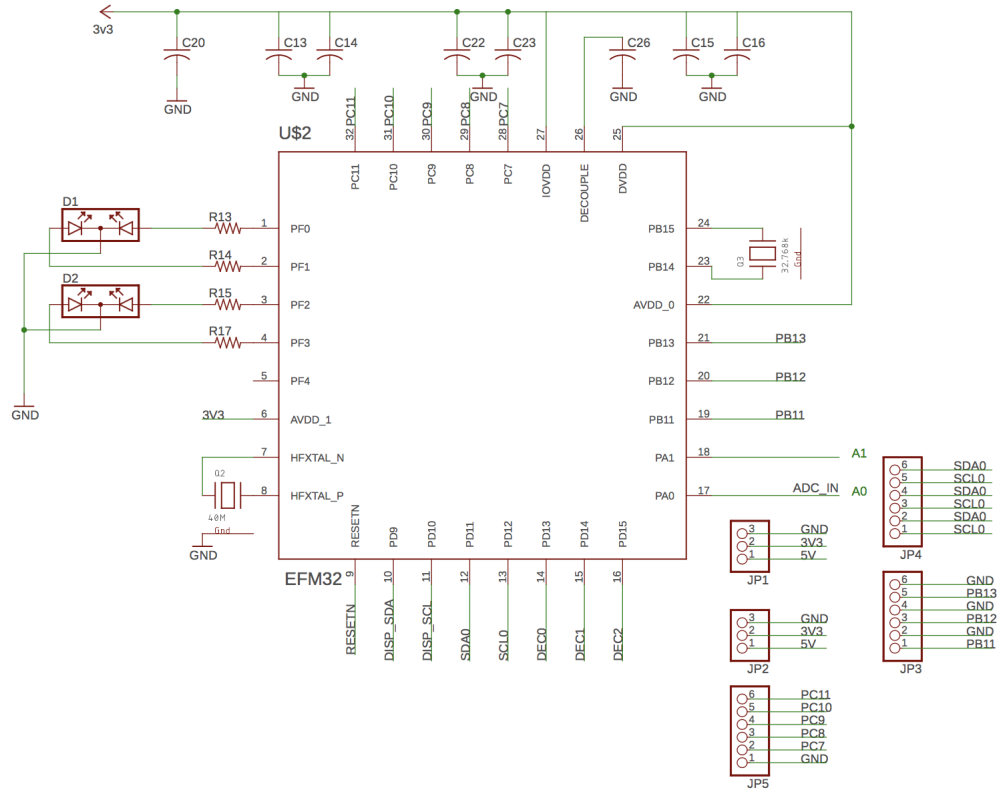


Figure 5: Microcontroller Schematic

2.5 Tolerance Analysis

The most critical aspect of our project is its ability to identify the note of the input sound. The components involved are the mic, amplifier, and the algorithm running on the microprocessor. The determined fundamental frequency is affected by noise which will come from the environment - e.g. fans and the circuit itself - e.g. microphone, amplifier, and ADC. For the tolerance analysis, we will investigate how the input sound quality affects the error rate of the monophonic pitch detection algorithm.

2.5.1 Input Signal SNR

The goal of this analysis is to determine the lowest SNR which the input signal can have such that the algorithm determines the fundamental frequency within

the spec limit called Fundamental Frequency Error (FFE)

$$FFE = |ActualFundamental - CalculatedFundamental| \quad (1)$$

- Input signal SNR
- Total harmonic distortion of the amplifier
- Algorithm Robustness

To determine the SNR our algorithm can handle, we added a gaussian noise to a prerecorded input signal. The power of our noise is calculated using the equation

$$SNR = 10\log_{10} \frac{P_{signal}}{P_{noise}} \quad (2)$$

The SNR was varied by calculating the power of the noise which would result in a particular SNR. SNRs of 0, 10, 20, 30, 40, 50 , 60 dB were used in this analysis.

SNR	FFE
60 dB	0.1Hz
50 dB	0.3Hz
40 dB	0.5Hz
30 dB	1.0 Hz
20 dB	5.0 Hz
10 dB	7.0 Hz
0 dB	10.0 Hz

Table 2: Tolerance Analysis on SNR

The algorithm stored in the microprocessor in the control system module poses the greatest risk to the project. The algorithm’s ability to simultaneously identify multiple fundamentals is more complex than detecting single pitches and will likely require the most time to develop. If a robust multiple pitch detection algorithm could not be developed, the customer will not be able to quickly map chords to the piano. However, single pitch detection is available for the user to play individual notes of the chord on the source instrument and know the positions on the piano.

3 Cost and Schedule

3.1 Cost Analysis

3 persons x 15 hrs/person/week x \$50/hr x 13 weeks = \$29,250

Parts And Labor	Price
Labor	\$29,250
Microcontroller EFM32PG1	\$3.3
MEMS Mic CMA-4544PF-W	\$0.82
Mic Amplifier MAX9814	\$1.51
LEDs	\$40.50
Batteries	\$13.00
Stepdown Convertors	\$6.31
Power MOSFET	\$5.20
Battery Charger	\$4.80
Voltage Regulator	\$3.3
Button JS5208	\$3.03
LCD screen LS013B7DH03	\$21.62
Total	\$29,353.39

Table 3: Cost Table

3.2 Schedule

Time	Tasks	Ted	Chris	Jiajun
02/22	Finish the design document	x	x	x
03/02	Board Layout		x	
	Develop pitch detection algorithm on instrument recordings	x		x
	Order all parts	x		
03/09	Test pitch detection algorithm	x		x
	Verify power supply components		x	
	Verify ADC, FFT, and LCD on board and LEDs	x	x	
03/16	Finalize/order PCB Design Rev1		x	
	Verify mic and amplifier			x
	Make algorithm process in real time	x		x
	Stream battery status and current instrument on LCD		x	
03/23	SPRING BREAK			
	Solder components on board	x	x	x
	Verify PCB & Debug	x	x	x
	Port algorithm to C and reduce run-time	x		x
03/30	Order final PCB		x	
	Test algorithm on hardware	x	x	x
04/06	Debug and finish remaining items	x	x	x
04/13	Finish Technical Work	x	x	x
04/20	Finish Presentation	x	x	x
04/27	Finish Paper	x	x	x

Table 4: Time Table and Task Distribution

4 Ethics and Safety

4.1 Ethics

To follow the #7 of IEEE code of ethics, “to seek, accept, and offer honest criticism of technical work, to acknowledge and correct errors, and to credit properly the contributions of others”[2]. We will be designing our own hardware module and software algorithms. If we come upon existing solutions that are available for us to use in our design, we will properly cite them. We will offer constructive advice to our team members and consider the advice given to us by other students, professors, and TA’s to improve the project.

This project doesn’t illegally use other people’s musical work, so there shouldn’t be any issues related to copyright infringement

The project’s use case is pretty limited for personal instrument learning, we don’t think there will be misuses of our project.

4.2 Safety

Li-ion batteries can explode when they are overcharged or overheated[3]. To prevent that, we need to make sure the battery is correctly charged and properly handled. The battery charging IC handles the voltages when charging, however we should always be present when handling a connected battery. We also need to make sure no water gets near the battery, and make sure the battery isn’t short circuited or handled near a fire. We will monitor our battery temperature, and in software, implement emergency shutdown when the battery is overheated.

References

- [1] Anssi Klapuri. *Signal Processing Methods for the Automatic Transcription of Music*. Tampere University of Technology, Tampere, Finland, 2004. Available: <https://pdfs.semanticscholar.org/1970/5f4c41c2ee8411aa7b940dbedc5b864070a6.pdf>
- [2] IEEE.org, *IEEE Code of Ethics*. Available: <https://www.ieee.org/about/corporate/governance/p7-8.html>
- [3] Battery University. *Safety Concerns with Li-ion* . Available: http://batteryuniversity.com/learn/article/safety_concerns_with_li_ion